

GLOBAL STANDARD VERTICAL MACHINING CENTER

# **DNM** 4500·5700·6700<sup>3th</sup>

**DNM** 4500L

**DNM** 5700L

**DNM** 6700L/XL



# DNM 4500L · 5700L · 6700L/XL

Building on the legacy of the proven and successful DNM and DNM II series, the new version DNM series boasts even greater reliability and improved performance. In addition, the new series includes grease lubrication to the roller guideways which is more environmentally-friendly. The design concepts underpinning the DNM L series are high speed, high rigidity and suitability for all applications. Standard features include the largest machining envelope in its class, direct coupled spindles, roller guideways and thermal compensation to deliver high precision.

## CONTENTS

### Product Overview

### Basic Information

### Detailed Information

04 Basic Structure

05 Spindle | Table

06 Tool Change System

07 Standard | Optional Specifications

08 Peripheral Equipment

09 FANUC i PLUS

10 EZ work

11 Convenient Operation

13 Power | Torque

16 Dimensions

18 Table

19 Machine Specifications



**A HIGHLY VERSATILE VERTICAL MACHINING CENTER WITH THE LARGEST MACHINING ENVELOPE IN ITS CLASS**



- DNM series machines have larger tables with increased Y-axis travels and increased maximum table loads.
- DNM machines with longer X-axes (i.e., DNM 4500L, 5700L, 6700L/XL), are available.

**STANDARD DIRECT-COUPLED SPINDLE FOR HIGHER PRODUCTIVITY**




- Directly coupled spindles reduce vibration and noise, thereby improving the machines' performance and making them more environmentally-friendly compared to belt driven machines.
- High-torque and high speed spindles are available for the machining of different materials.
- Higher productivity is achieved by reducing tool change times and by improving acceleration and deceleration rates.

**AN ENVIRONMENTALLY-FRIENDLY MACHINE DESIGNED FOR STABLE AND EASY OPERATION**



- Thermal error compensation system supplied as standard optimizes machine accuracy by reducing the effects of heat build-up during extended periods of operation.
- The EZ work function can be checked in the pop-up window on the NC main screen for convenience.
- Grease lubrication for the axis roller guideways is a standard feature and helps reduce contamination.

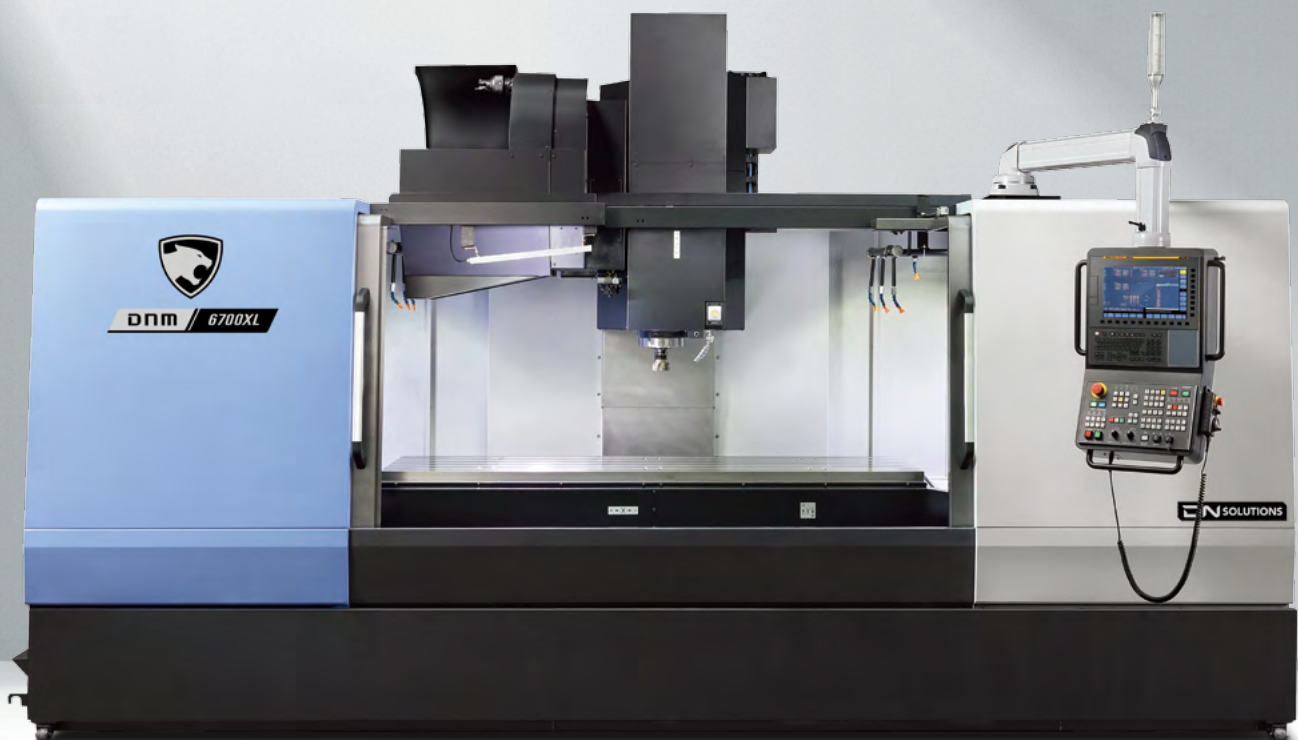

# BASIC STRUCTURE

Designed with a highly stable and rigid structure, the new DNM series provides customers with machines with different Y-axis capabilities (from 450mm to 670mm), enabling the machining of a wider range of workpieces.

## Travel distance (X / Y / Z axis)

DNM 4500L


**910 / 450 / 510** mm  
(35.8 / 17.7 / 20.1 inch)

DNM 5700L

**1300 / 570 / 510** mm  
(51.2 / 22.4 / 20.1 inch)

DNM 6700L/XL

**1500{2100} /  
670 / 6250** mm  
(59.1{82.7} / 26.4 / 24.6 inch)

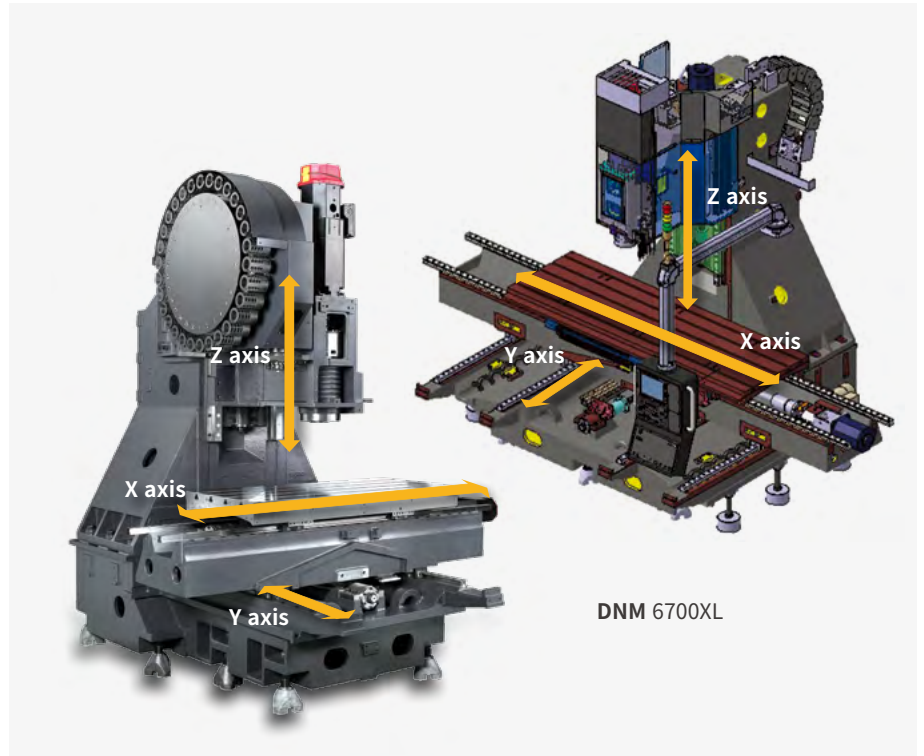

## Axis system

Environmentally-friendly oil lubrication is adopted as standard for all the axis feed systems, and roller-type LM guides are used to enhance rigidity.

## Rapid traverse rate (X / Y / Z axis)

DNM 4500L / 5700L / 6700L

**36 / 36 / 30** m/min  
(1417.3 / 1417.3 / 1181.1 ipm)

DNM 6700XL

**30 / 30 / 30** m/min  
(1181.1 / 1181.1 / 1181.1 ipm)

Roller-type LM Guides are provided as a standard feature.



Grease lubrication for all axes is a standard 4 feature.

# SPINDLE | TABLE

Directly-coupled spindles have been adopted as a standard feature to further reduce vibration and noise and enhance productivity, increase accuracy and improve the working environment. High-torque and high speed spindle options for machining different materials are available.

## Max. spindle speed

**8000** r/min  
{12000 / 15000 OPTION} r/min


## Max. spindle motor power

**18.5** kW (24.8 Hp)

## Max. spindle motor torque

**117.8** N·m (86.9 lbf-ft)  
(8000 r/min, 12000 r/min,  
15000 r/min)

**286** N·m (211.1 lbf-ft) OPTION  
(8000 r/min high torque version)

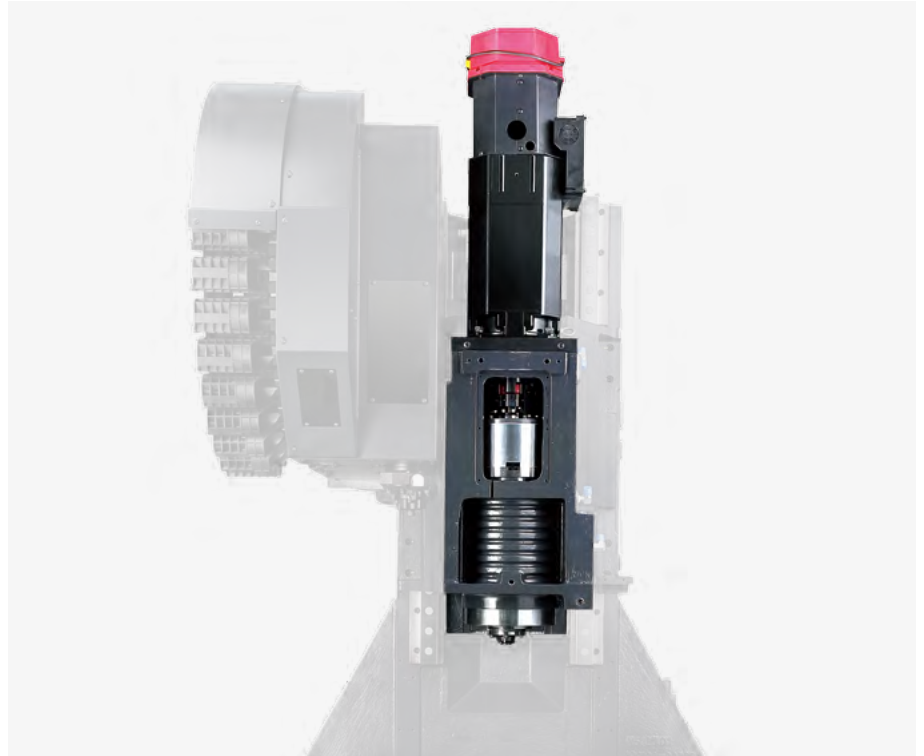

## TABLE

Increased table sizes and table load capacities are provided within the same floor space of the previous models.

### Table size (A x B)

DNM 4500L

**1050 x 450** mm  
(41.3 x 17.7 inch)

DNM 5700L

**1500 x 570** mm  
(59.1 x 21.3 inch)

DNM 6700L/XL

**1600 {2200} x 670** mm  
(63.0{86.6} x 26.4 inch)

### Max weight on Table


DNM 4500L

DNM 5700L

**600** kg (1322.8 lb) **1000** kg (2204.6 lb)

DNM 6700L/XL

**1300** kg (2866.0 lb)

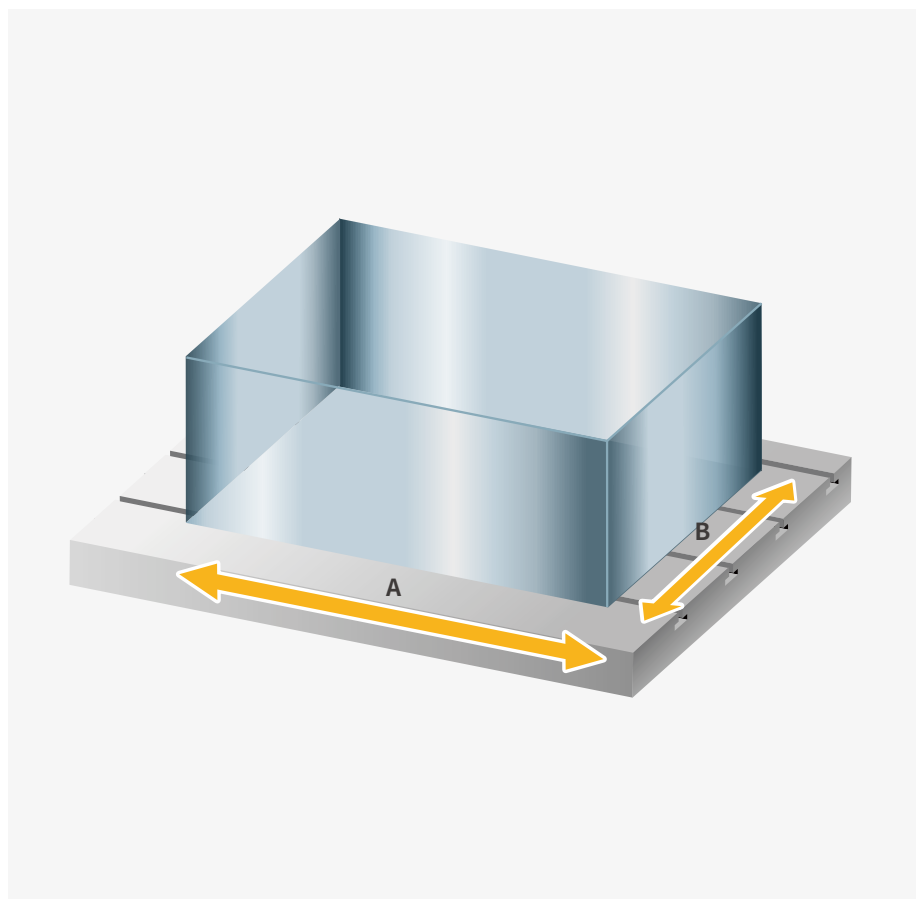

# TOOL CHANGE SYSTEM

Tool changers have been optimized to reduce non cutting times. The highly-reliable tool magazine can accommodate up to 30 tools as standard.



Tool to Tool time

**1.2 S**

Chip to Chip\* time

**3.2 S**

*\* The Chip-to-Chip time has been tested in accordance with DN Solutions's strict testing procedures, but may vary depending on the user's operating conditions.*

Tool storage capacity

**30** {40 / 60 **OPTION**} ea



30, 40개



60개

# STANDARD | OPTIONAL SPECIFICATIONS

Various optional features are available to meet customers' specific machining requirements and applications.

Description	Features	DNM 4500L	DNM 5700L	DNM 6700L/XL	
Spindle	FANUC	Max Spindle Speed: 8000 r/min. Power: 11/18.5(S3 15%) kW	●	●	X
		Max Spindle Speed: 8000 r/min. Power: 15/18.5(S3 25%) kW	X	X	●
		Max Spindle Speed: 12000 r/min. Power: 11/18.5(S3 15%) kW	○	○	○
		Max Spindle Speed: 8000 r/min. Power: 11/15(S3 25%) kW	○	○	○
		Max Spindle Speed: 15000 r/min. Power: 11/18.5(S3 15%) kW	○	○	X
		Max Spindle Speed: 12000 r/min. Power: 10/17(S6 25%) kW	●	●	X
	HEIDENHAIN	Max Spindle Speed: 12000 r/min. Power: 15/20(S6 60%)kW	X	X	●
		Max Spindle Speed: 15000 r/min. Power: 10/17(S6 25%) kW	○	○	○
		Max Spindle Speed: 12000 r/min Power: 11/16.5(S6 40%) kW	●	●	X
	SIEMENS	Max Spindle Speed: 12000 r/min. Power: 16.3/21.8(S6 40%) kW	X	X	●
		Max Spindle Speed: 15000 r/min. Power: 11/16.5(S6 40%) kW	○	○	○
			○	○	○
Magazine	Tool storage capacity	30 ea	●	●	
		40 ea	○	○	
		60 ea	○	○	
Tool shank type		BIG PLUS BT40	●	●	
		BIG PLUS CAT40	○	○	
		BIG PLUS DIN40	○	○	
Raised column		150 mm (5.9 inch)	○	○	
		200 mm (7.9 inch)	○	○	
		300 mm (11.8 inch)	○	○	
Coolant	Flood	0.16/0.12 MPa (0.4 kW)	●	●	
		1.0/0.75 MPa (1.11 kW)	○	○	
	TSC**	None	●	●	
		2.0/1.9 MPa (1.5 kW)	○	○	
		2.0/1.3 MPa (4.0 kW)	○	○	
		2.0 MPa (4.0 kW)	○	○	
		3.0/3.0 MPa (2.9 kW)	○	○	
		7.0 MPa (7.5 kW)	○	○	
	Shower Coolant	Max pressure 60Hz/50Hz (Pump motor power)	0.1/0.065 MPa (1.1 kW)	○	○
				○	○
Flushing Coolant	Maxpressure 60Hz/50Hz (Pump motor power)	0.2/0.1 MPa (1.8 kW)	○	○	
			○	○	
Chip disposal	Chip conveyor	Chip pan	●	●	
		Magnetic scraper type (Left/Right/Rear)	○	○	
		Screw(AUGER) type (Left/Right)	○	○	
Precision machining option	Linear scale	X / Y / Z axis	○	○	
		AICC II (200 block)	●	●	
		SSP (Smooth Surface Package)	○	○	
Measurement & Automation	Automatic tool measurement	TS27R_RENISHAW	○	○	
		OTS_RENISHAW	○	○	
	Automatic tool breakage detection	SCHUBERT SYSTEM ELEKTRONIK GmbH / BK97 (NEEDLE TYPE IN CUTTING AREA)	○	○	
		OMP60_RENISHAW	○	○	
	Automatic workpiece measurement		○	○	
	Automatic front door with safety device		○	○	
	AWC	8 Pallet	○	○	
ATC Auto Shutter	30 Tool/40 Tool	○	○		
ATC Full Cover	30 Tool/40 Tool	○	○		
Accessories	WORK LIGHT	LED LAMP	●	●	
		3-COLOR SIGNAL TOWER(LED)	●	●	
	LEVELING BLOCK & BOLT	-	●	●	
	SMART THERMAL CONTROL	SENSORLESS TYPE(ONLY SPINDLE)	●	●	
	ASSEMBLY & OPERATION TOOLS KIT	-	●	●	
	4 <sup>th</sup> AXIS PREPARATION CABLING FOR SERVO/1-PNEUMATIC PIPING	FACTORY READY MADE	○	○	
	AIR GUN		○	○	
	Air blower		○	○	
	Coolant gun		○	○	
	Mist collector		○	○	
Customized Special Option	ANCHORING <sup>(1)</sup>	SLIDE CLAMP & CHEMINCAL ANCHOR BOLT	○	○	
		0.54	○	○	
		TOOL TYPE	HSK63A	○	○
		ATC AUTO SHUTTER	30TOOL / 40TOOL	○	○
		ATC FULL COVER	30TOOL / 40TOOL	○	○
		SCRAPER TYPE		○	○
	Oil lubrication	X, Y, Z AXIS	○	○	
		20 Bar TSC with inverter	50Hz → 60Hz	○	○
		FINE DUST PROTECTING PACKAGE	BELLOWS COVER(X/Y/Z)	○	○
			PROTECT COVER(X-AXIS)	○	○
			BALL SCREW BELLOWS COVER(X/Y)	○	○
			GUIDE WAY DOUBLE WIPER	○	○
PROTECT COVER(X-AXIS)	○		○		
BALL SCREW BELLOWS COVER(X/Y)	○		○		
DRY MACHINING	GUIDE WAY DOUBLE WIPER	○	○		
	AIR OIL SUCTION(ONLY 15k SPINDLE)	○	○		
	ATC FULL CLOSED COVER	○	○		
		○	○		

\* Please contact DN Solutions for detailed specification information.

● Standard ○ Optional X/N/A

\* If this option is selected, the TSA(Through Spindle Air) Max.pressure is 0.54MPa

1) Please refer to foundation drawing in relation to anchoring. If more detailed information is required consult with DN Solutions service

2) If TSC is not required - TSA can be selected as an option.

\*\* When using a semi-synthetic type or synthetic type, contact our sales representative or service center in advance.



There is a high risk of fire when using non-water-soluble cutting fluids, processing flammable materials, neglecting the controlled and careful use of coolants and modifying the machine without the consent of the manufacturer. Always check the SAFETY GUIDELINES carefully before using the machine.

# PERIPHERAL EQUIPMENT

## Grease lubrication system

The standard grease lubrication system eliminates the need for an oil skimmer and reduces lubrication costs by about 60% compared to oil lubrication.

### Yearly maintenance cost

Reduced by  
**Max. 60%**




## Raised column OPTION


When the distance between the table and the spindle nose needs to be extended, for example, to accommodate a fixture or a rotary table, the solid one-piece raised column can be raised to increase the distance required.

### Height

**150/200/300 mm**  
(5.9/7.9/11.8 inch)




## Chip conveyor OPTION



Hinged belt



Magnetic scraper



Screw (Auger) type

## Chip bucket OPTION


Capacity **300 L** (79.3 gal)



Chip conveyor type	Material	Description
Hinged belt	Steel	Hinged belt chip conveyor, which is most commonly used for steel work [for cleaning chips longer than 30mm(1.2inch)], is available as an option.
Magnetic scraper	Cast Iron	Magnetic scraper type chip conveyor, which is ideal for die-casting work [for cleaning small chips], is available as an option.
Screw (Auger) type	Steel	Screw (Auger) type chip conveyor is suitable for minimizing installation space. About 85% floor space is required to install Screw (Auger) type chip conveyor compared to Hinged belt type.

## Hydraulic / Pneumatic fixture line OPTION

The user should prepare pipelines for hydraulic/pneumatic fixtures whose detailed specifications should be determined through discussions with DN Solutions.




## 4 axis rotary table OPTION

The high-precision split system with its compact and highly rigid design, and double piston structure enables vertical and horizontal use and delivers a strong clamping force.



## ATC shutter door OPTION

An ATC shutter door can be applied instead of the brush mechanism to provide a higher level of protection from potential chip ingress.




## AWC system OPTION

A compact automatic workpiece change system

Pallet size	No. of pallets	Max. workpiece dia. x height	Max. workpiece weight
250 x 250mm (9.8x9.8 inch)	12ea	Ø300x350mm (11.8x13.8 inch)	130kg (286.6 lb)
350 x 350mm (13.8x13.8 inch)	8ea	Ø400x350mm (15.7x13.8 inch)	300kg (661.4 lb)
400 x 400mm (15.7x15.7 inch)	6ea	Ø450x350mm (17.7x13.8 inch)	
500 x 500mm (19.7x19.7 inch)	4ea	Ø550x350mm (21.7x13.8 inch)	

## Pallet storage-table configuration

Unit : mm (inch)

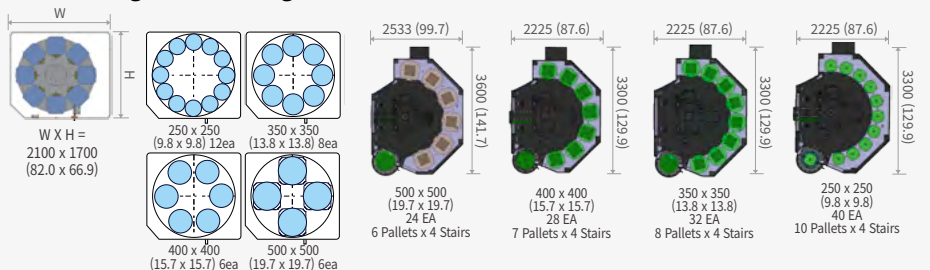

# FANUC i PLUS

Fanuc i Plus is optimized for maximizing customer productivity and convenience.

## 15 inch screen + new operation panel

DN Solutions Fanuc i Plus' operation panel enhances operating convenience by incorporating common-design buttons and layout, and features the Qwerty keyboard for fast and easy operation.

## FANUC i Plus

- 15 inch color display
- Intuitive and user-friendly design

## USB & PCMCIA card QWERTY keyboard

- EZ-guide i standard
- Ergonomic operator panel
- 2MB Memory
- Hot key

## iHMI touchscreen OPTION

iHMI provides an intuitive interface that uses a touchscreen for quick and easy operation.

## Range of applications

Providing various applications related to planning, machining, improvement and utility, for customer convenience.



## NUMERIC CONTROL SPECIFICATIONS



Item		Specifications	Fanuc i (F0i Plus) DNM 4digit	
Controlled axis	Controlled axes		3 (X,Y,Z)	
	Simultaneously controlled axes		4 axes	
	Additional controlled Axis	Add 1 Axis (5th Axis)	●	
Data input/output	Fast data server		○	
	Memory card input/output		●	
	USB memory input/output		●	
	Large capacity memory(2GB)*2	Available Option only with 15" Touch LCD (iHMI Only) *2)	○	
Interface function	Embedded Ethernet		●	
	Fast Ethernet		○	
	Enhanced Embedded Ethernet function		●	
Operation	DNC operation	Included in RS232C interface.	●	
	DNC operation with memory card		●	
Program input	Workpiece coordinate system	G52 - G59	●	
	Addition of workpiece coordinate system	G54.1 P1 X 48 (48 pairs)	●	
	Tool number command		T4 digits	
	Tilted working plane indexing command	G68.2 TWP	○	
Feed function	AI contour control I	G5.1 Q , 40 Blocks	X	
	AI contour control II	G5.1 Q , 200 Blocks	●	
	AI contour control II	G5.1 Q , 600 Blocks	X	
	AI contour control II	G5.1 Q , 1000 Blocks *1)	X	
	High smooth TCP		X	
Operation guidance function	EZ Guidei (Conversational Programming Solution)		●	
	iHMI with Machining Cycle	Only with 15" Touch LCD standard *2)	X	
	EZ Operation package		●	
Setting and display	CNC screen dual display function		●	
	FANUC MTConnect		⊕	
Network	FANUC OPC UA		⊕	
	Others	Display unit	10.4" color LCD	X
		15" color LCD	X	
		15" color LCD with Touch Panel	●	
Part program storage size & Number of registerable programs			640M(256KB)_500 programs	X
			1280M(512KB)_1000 programs	X
			2560M(1MB)_1000 programs	X
			5120M(2MB)_1000 programs	●
			10240M(4MB)_1000 programs	X
			20480M(8MB)_1000 programs	X
			2560M(1MB)_2000 programs	X
			5120M(2MB)_4000 programs	X
			10240M(4MB)_4000 programs	X
		20480M(8MB)_4000 programs	X	

\*1) The number of look-ahead blocks may be changed or limited depending on the peripheral device or the configuration of the internal NC system.

\*2) Available Option only with Fanuc i plus iHMI

● Standard ○ Optional X/N/A ⊕ Available  
Network: FANUC MT Connect and FANUC OPC UA available.

# EZ WORK

The software developed by DN Solutions provides a range of different functions designed for fast, efficient and convenient operation.

## EZ work

The EZ work package delivers speed and efficiency. This menu-driven innovation not only helps customers reduce setup times, but also simplifies common tasks and procedures, reducing the potential for errors. EZ work reduces operating time, protects machinery, enhances quality and speeds up maintenance interventions.



### Thermal Compensation

A function to maintain high-precision machining quality by analyzing and correcting the amount of thermal displacement of a structure through a temperature sensor



### M/G-Code List

Functional description of M code and G code



### Tool Management

Function to manage tool information [Tool information / Tool No. / Tool condition (normal, large diameter, worn / damaged, used for the rst time, manual) / Tool name]




### Operation Rate

Machine operation history management function by date based on load



### Adaptive Feed Control

Function to control feedrate so that the cutting can be carried out at a constant load (To adapt to the spindle load set up with constant load feedrate control function)

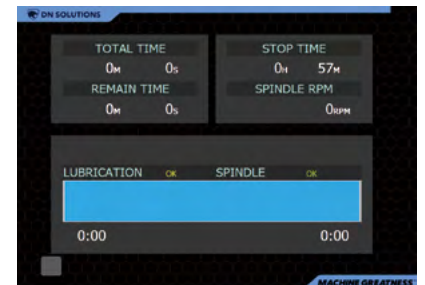


### Spindle Warm Up

A function that assists spindle warm-up for spindle life when the spindle has not been used for a certain period of time



### ATC Recovery

Function to view detailed info with recommended actions and to perform step-by-step operation manually (when an alarm is triggered during an ATC operation)

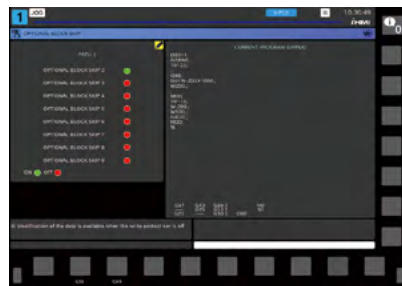

### Addition of Optional Block Skip

In addition to the OPTIONAL BLOCK SKIP of the operation panel, the function to skip a specific block selected in the machining program

# CONVENIENT OPERATION

## HEIDENHAIN TNC620


### Superior hardware specifications

The TNC 620 features optimized motion control, short block processing times and special control strategies. Together with its uniform digital design and its integrated digital drive control (including inverters), it enables you to achieve high machining speeds and the best possible contour accuracy.


- 15.6" display
- 21GB Storage memory
- 1024 look ahead blocks
- High user convenience with folder structure data management




### Conversational convenient function



Data are controlled in the folder structure; convenient communication via USB devices




KinematicOpt & KinematicComp **OPTION**  
(Touch probe cycle for automatic measurement)




Collision protection system **OPTION**



Adaptive feed control **OPTION**



Various built-in pattern cycles for a wider scope of application (Software standard)



Graphic simulation

## NUMERIC CONTROL SPECIFICATIONS



HEIDENHAIN

Item		Specifications	TNC620
			DNM
Controlled axis	Controlled axis		3 (X,Y,Z)
	Simultaneously controlled axis		4 axis
Data input/output	USB memory input/output		●
Interface function	Embedded ethernet		●
Feed function	Look-ahead	5000 blocks	●
Axis compensation	KinematicsOpt	Automatic measurement and optimization of machine kinematics	○
Collision monitoring	Dynamic collision monitoring (DCM)		X
Network	MTConnect		⊕
Others	Display unit	15" color LCD with touch panel	●
	Part program storage size & number of registerable programs	4GB	●

# CONVENIENT OPERATION

## SIEMENS 828D


### 15.6" screen + new operation panel

The newly-designed operation panel improves the customer convenience by incorporating and using common-design buttons and layouts, and includes the familiar QWERTY keyboard for fast and easy operation.

- 15.6" display
- 10MB high capacity user memory
- USB & ethernet (standard)
- QWERTY keyboard (standard)
- High-speed calculation and simulation can be fulfilled by improved processor functionality




### Conversational convenient function

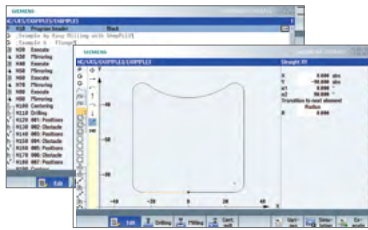


Shop Mill Part Programming




Smart function

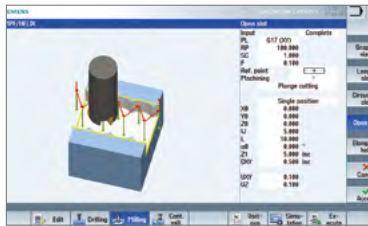

Advanced program language programGUIDE

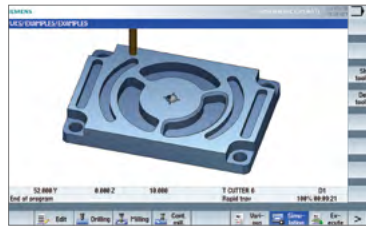

Simulation and machining contour monitoring

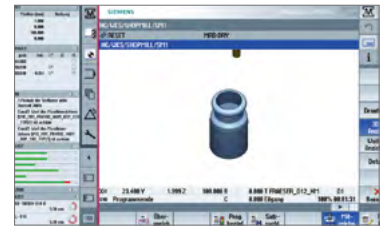

Side screen widget

## NUMERIC CONTROL SPECIFICATIONS



Item	Specifications	S828D
		DNM
Controlled axis	Controlled axes	-
	Simultaneously controlled axes	-
Data input/output	Memory card input/output	(Local drive)
	USB memory input/output	X
Interface function	Ethernet	●
Operation	On network drive	(X130)
	On USB storage medium, e.g. memory stick	(without EES option, Extcall)
Program input	Workpiece coordinate system	●
	Addition of workpiece coordinate system	G54 - G57
Interpolation & Feed function	Advanced surface	●
	Top surface	○
Programming & Editing function	Look ahead number of block	S/W version 4.95
	3D simulation, finished part	●
	Simultaneous recording	●
	Measure kinematics	X
Operation Guidance Function	DXF Reader for PC integrated in SINUMERIK Operate	○
	ShopMill	●
Setting and display	EZ Work	●
	Operation via a VNC viewer	●
Network	MTConnect	⊕
	OPCUA	○
Etc. function	15.6" color display with touch screen	●
	19" color display without touch screen	X
	21.5" color display with touch screen	X
	CNC user memory	10 MB
	Expansion by increments	2 ~ 12 MB
	Collision avoidance	X
Collision avoidance ECO (machine, working area)	X	


# POWER | TORQUE

FANUC

## DNM 4500L, 5700L


### 8000 r/min

Max. spindle power : 18.5 kW (24.8 Hp)  
 Max. spindle torque : 117.8 N·m (86.9 lbf-ft)

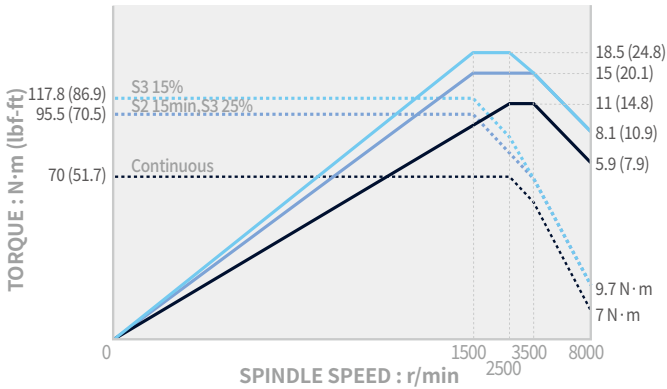

### 8000 r/min OPTION


Max. spindle power: 15 kW (20.1 Hp)  
 Max. spindle torque: 286 N·m (211.1 lbf-ft)

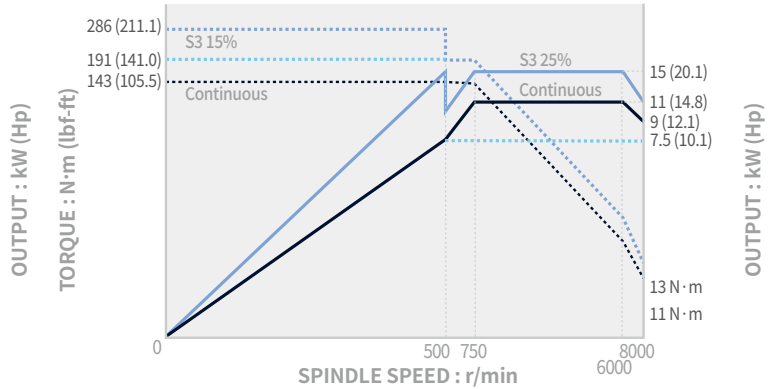

## DNM 6700L/XL


### 8000 r/min

Max. spindle power: 18.5 kW (24.8 Hp)  
 Max. spindle torque: 117.8 N·m (86.9 lbf-ft)

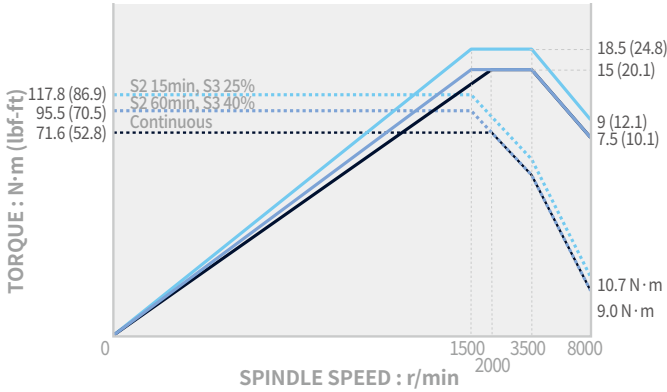

### 8000 r/min OPTION


Max. spindle power: 15 kW (20.1 Hp)  
 Max. spindle torque: 286 N·m (211.1 lbf-ft)

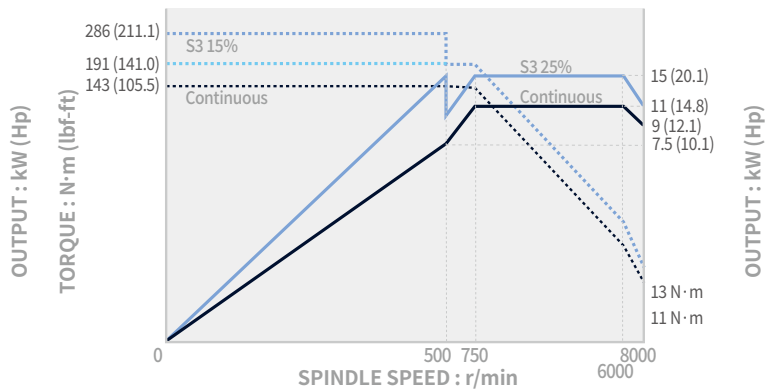

## DNM 4500L, 5700L, 6700L/XL


### 12000 r/min OPTION

Max. spindle power: 18.5 kW (24.8 Hp)  
 Max. spindle torque: 117.8 N·m (86.9 lbf-ft)

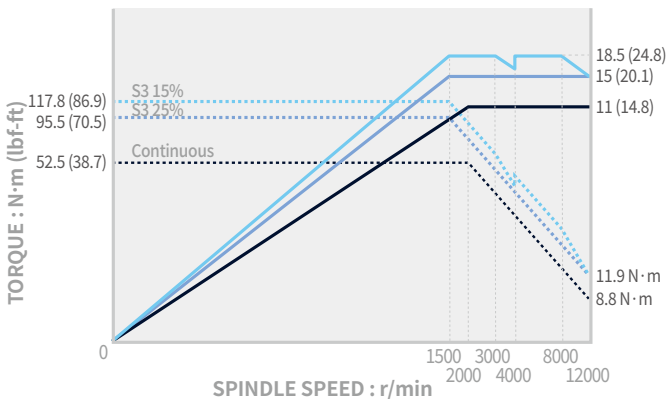

### 15000 r/min OPTION

Max. spindle power: 18.5 kW (24.8 Hp)  
 Max. spindle torque: 117.8 N·m (86.9 lbf-ft)

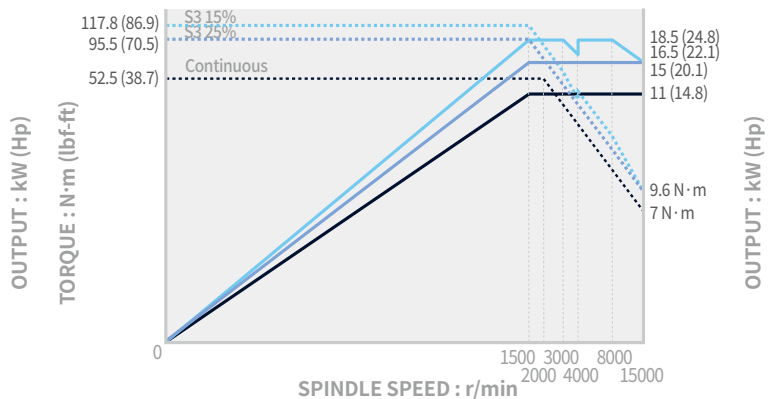

# POWER | TORQUE

SIEMENS

## DNM 4500L, 5700L


**12000** r/min

Max. spindle power

**16.5** kW  
(22.1 Hp)

Max. spindle torque

**141.3** N.m  
(104.3 lbf-ft)

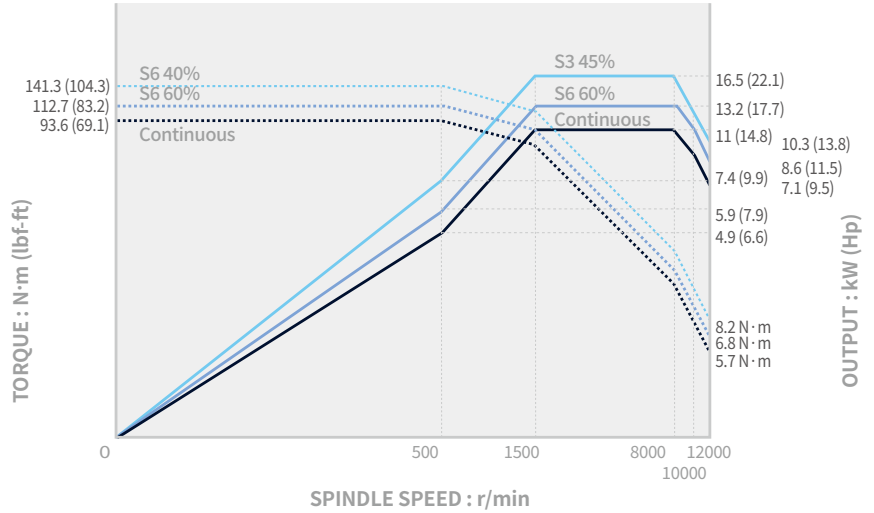

## DNM 6700L/XL


**12000** r/min OPTION

Max. spindle power

**21.8** kW  
(29.2 Hp)

Max. spindle torque

**150.1** N.m  
(110.8 lbf-ft)

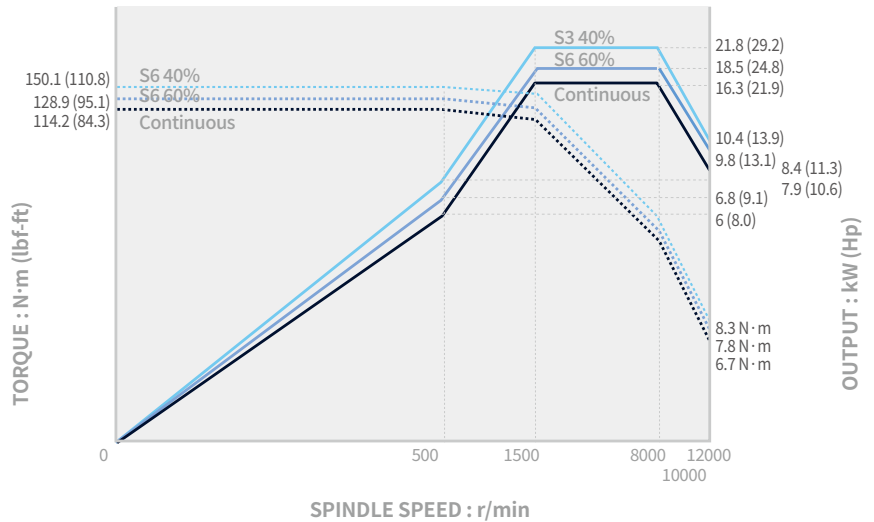

## DNM 4500L, 5700/L, 6700/L/XL


**15000** r/min OPTION

Max. spindle power

**16.5** kW  
(22.1 Hp)

Max. spindle torque

**141.3** N.m  
(104.3 lbf-ft)

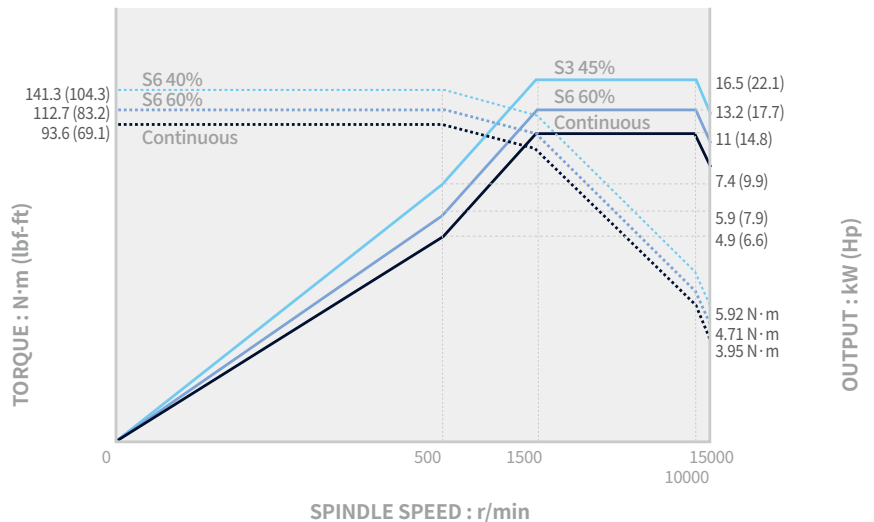

# POWER | TORQUE

HEIDENHAIN | MITSUBISHI

## HEIDENHAIN\_DNM 4500L, 5700L


**12000** r/min

Max. spindle power

**17** kW  
(22.8 Hp)

Max. spindle torque

**108.2** N.m  
(79.9 lbf-ft)

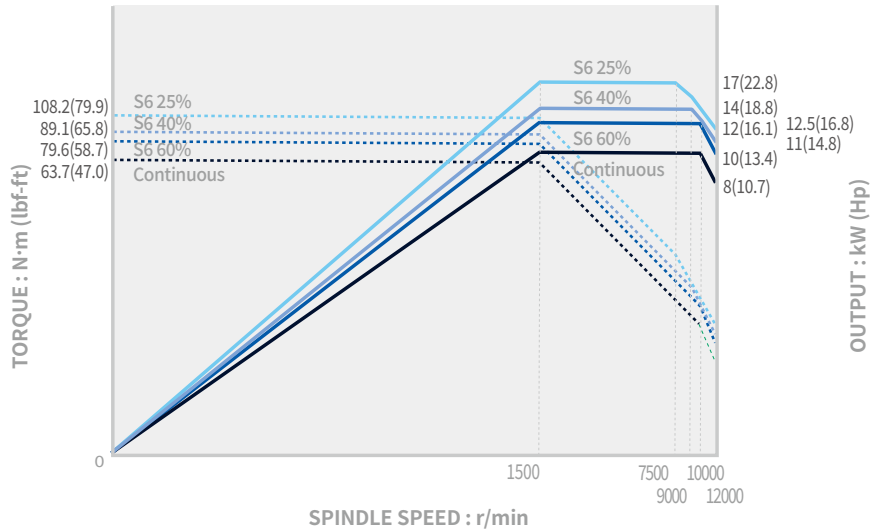

## HEIDENHAIN\_DNM 6700L/XL


**15000** r/min OPTION

Max. spindle power

**17** kW  
(22.8 Hp)

Max. spindle torque

**108.2** N.m  
(79.9 lbf-ft)

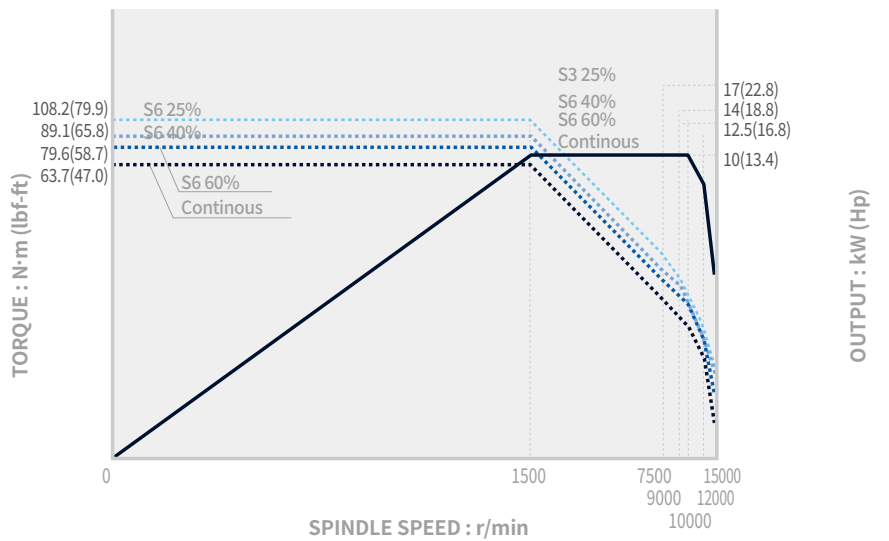

## MITSUBISHI \_DNM 4500L, 5700/L, 6700/L/XL


**12000** r/min OPTION

Max. spindle power

**18.5** kW  
(24.8 Hp)

Max. spindle torque


**117.8** N.m  
(86.9 lbf-ft)

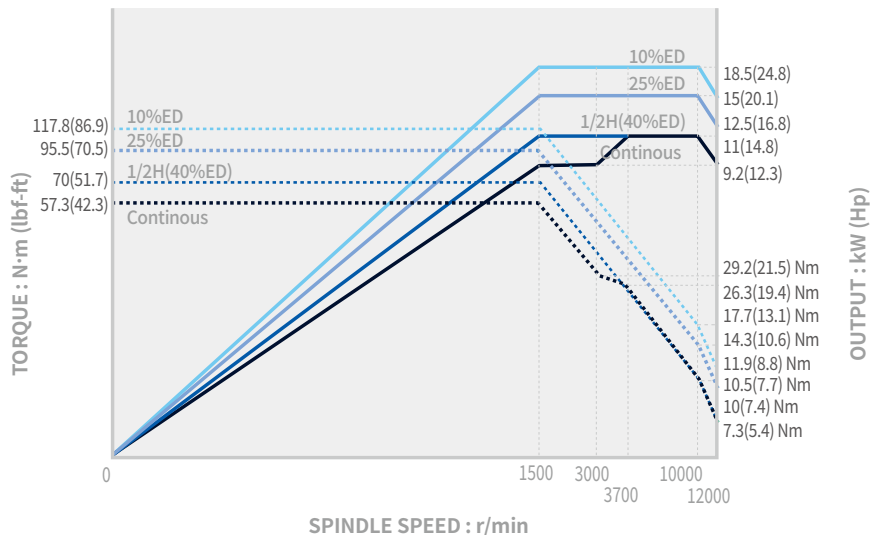

# DIMENSIONS

DNM 4500L/5700L/6700L/XL series

Units : mm (inch)

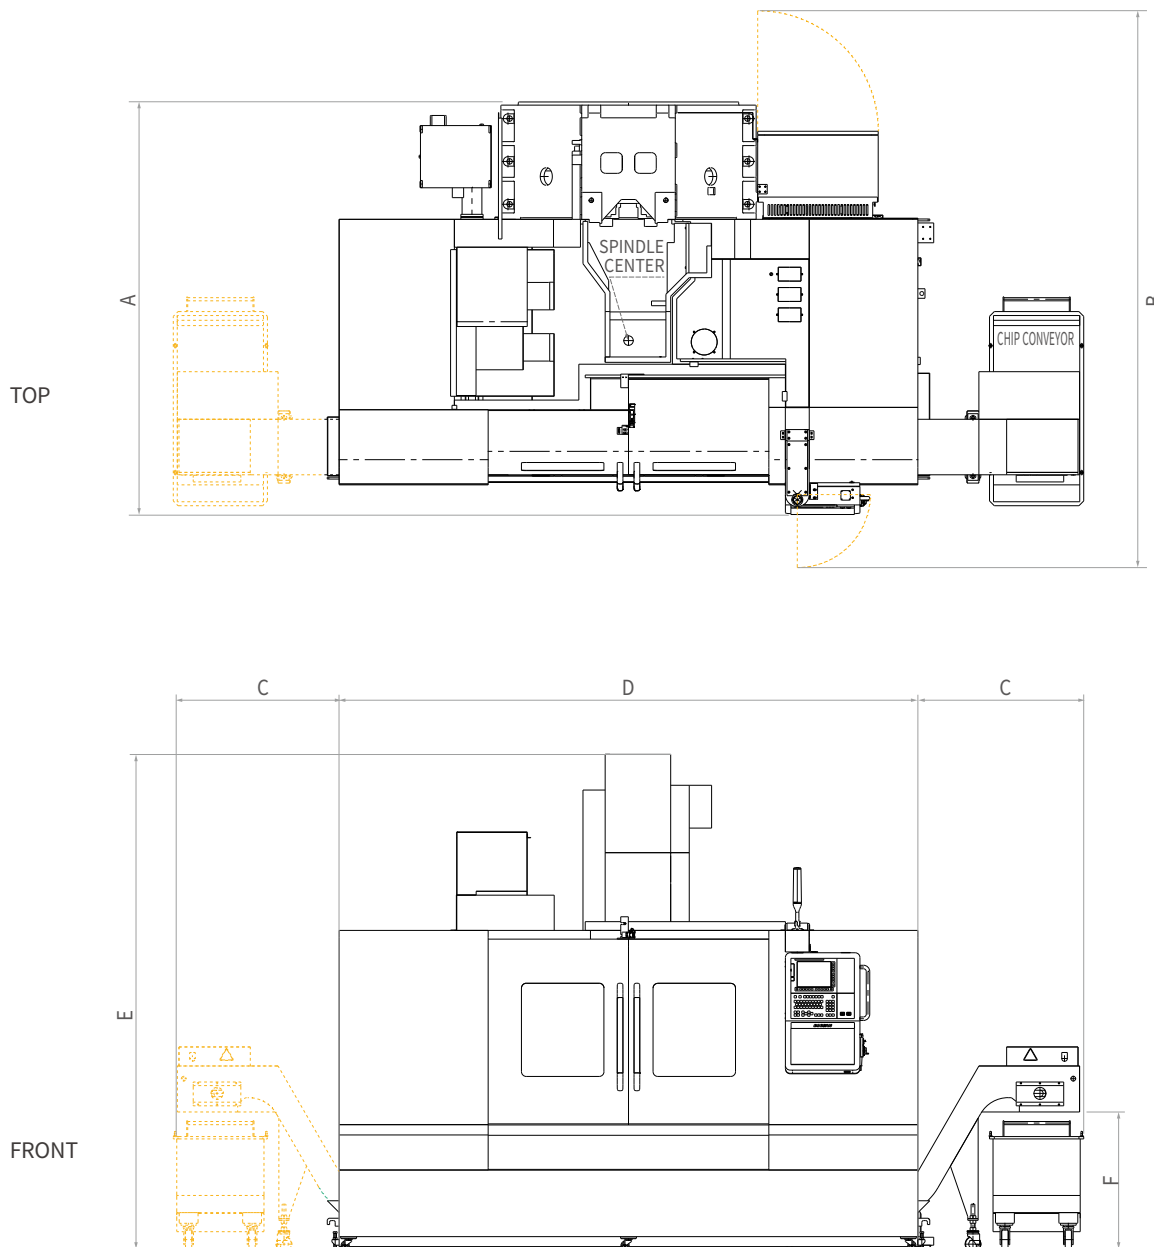

Model	A (Length)	B <sup>1</sup>	C <sup>2</sup>	D (Width)	E (Height)	F		
						SCRAPER	HINGED	SCREW
DNM 4500L	2158 (85.0)	3142 (123.7)	1040 (415) [40.9(16.3)]	2701 (106.3)	2985 (117.5)	883 (34.8)	865 (34.1)	440 (17.3)
DNM 5700L	2413 (95.0)	3272 (128.8)	1040 (415) [40.9(16.3)]	3350 (131.9)	2985 (117.5)	883 (34.8)	865 (34.1)	440 (17.3)
DNM 6700L	2597 (102.2)	3469 (136.6)	1040 (415) [40.9(16.3)]	3650 (143.7)	3120 (122.8)	883 (34.8)	865 (34.1)	440 (17.3)

<sup>1</sup> Max. machine length (including electric cabinet door and operation panel swiveling)


<sup>2</sup> Additional width to accommodate the side chip conveyor. [ ] indicates the additional width required to accommodate a screw(auger)type chip conveyor.

\* Some peripheral equipment can be placed in other places \* Rear chipconveyor need discuss with sales person

# DIMENSIONS

DNM 6700XL

Units : mm (inch)

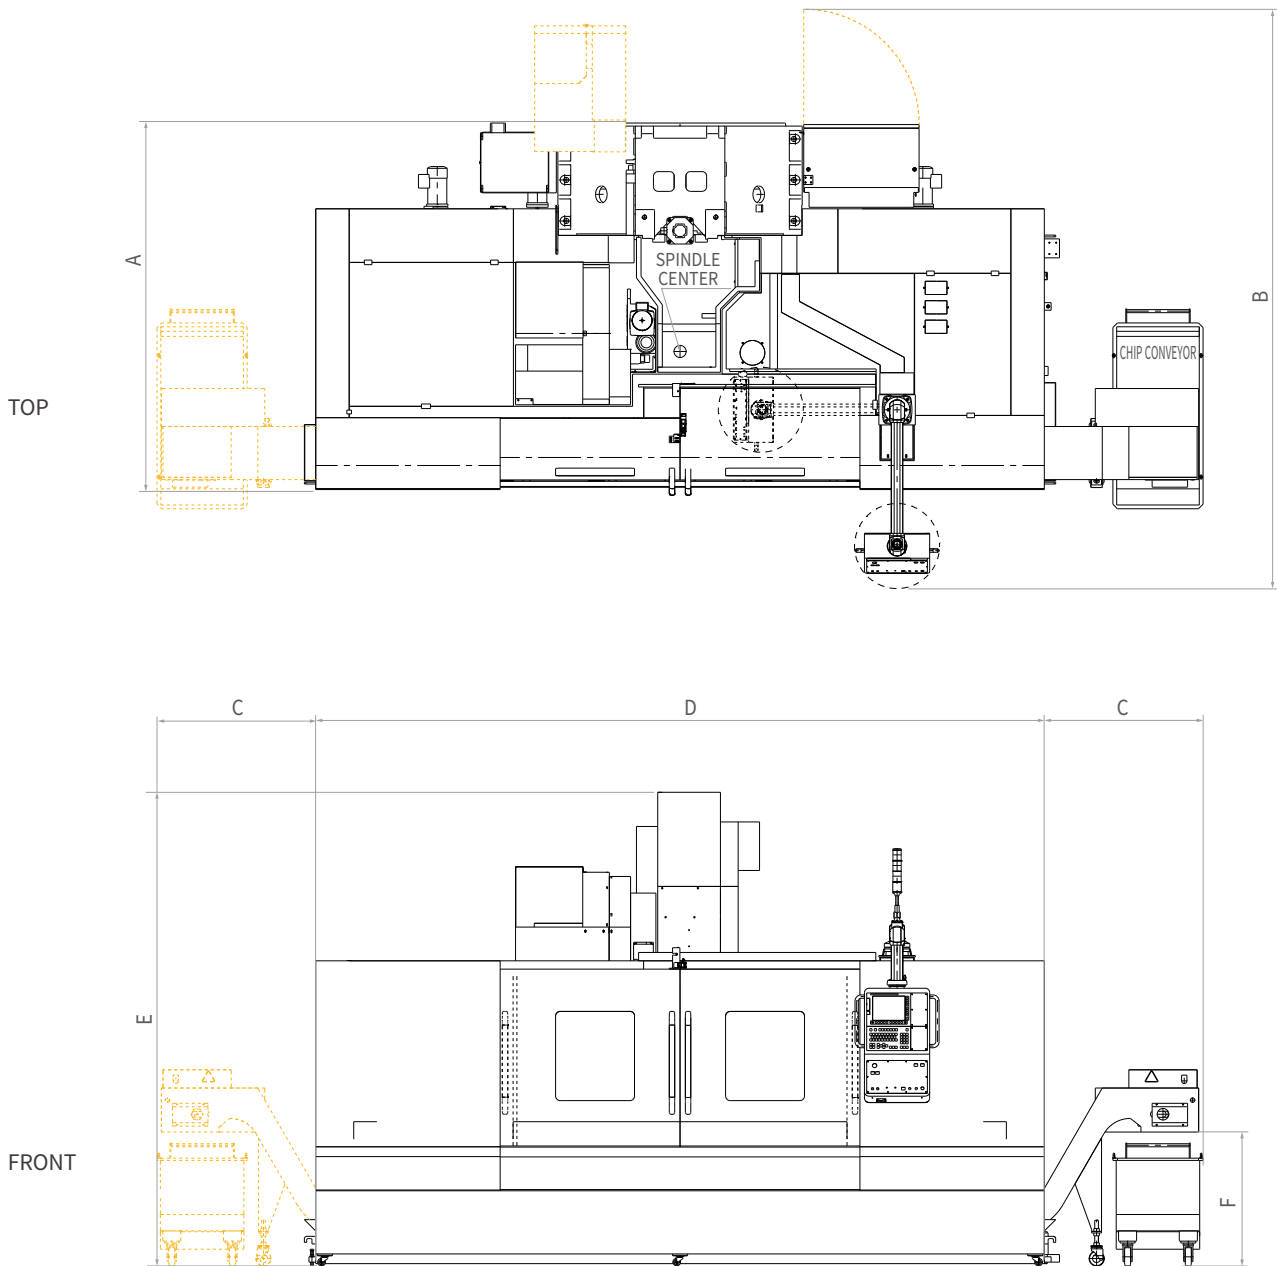

Model	A (Length)	B <sup>1</sup>	C <sup>2</sup>	D (Width)	E (Height)	F		
						SCRAPER	HINGED	SCREW
DNM 6700XL	2415 (95.1)	3820 (150.4)	1045 (41.1)	4800 (189.0)	3120 (122.8)	883 (34.8)	865 (34.1)	440 (17.3)

<sup>1</sup> Max. machine length (including electric cabinet door and operation panel swiveling)

<sup>2</sup> Additional width to accommodate the side chip conveyor. [ ] indicates the additional width required to accommodate a screw(auger)type chip conveyor.

\* Some peripheral equipment can be placed in other places



\* Rear chipconveyor need discuss with sales person

# TABLE


## DNM 4500L

## DNM 5700L


Units : mm (inch)

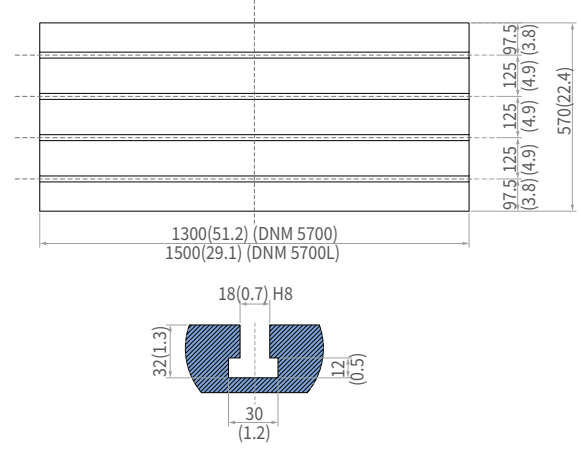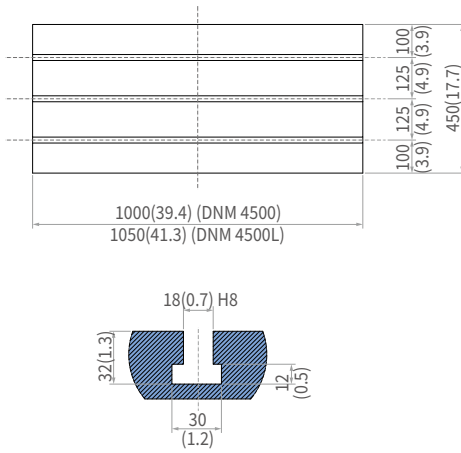

## DNM 6700L

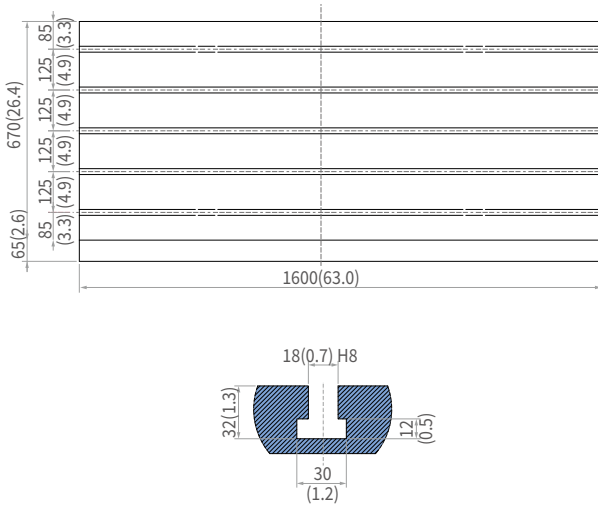

## DNM 6700XL

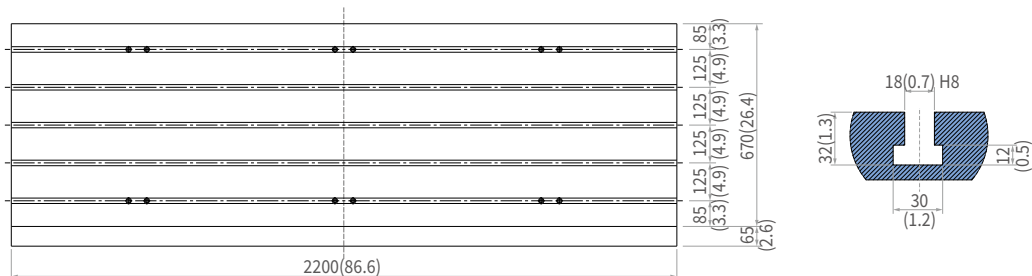

# MACHINE SPECIFICATIONS

Description		Unit	DNM 4500L	DNM 5700L	DNM 6700L	DNM 6700XL	
Travels	Travel distance	X axis	mm (inch)	910 (35.8)	1300 (51.2)	1500 (59.1)	2100 (82.7)
		Y axis	mm (inch)	450 (17.7)	570 (22.4)	670 (26.4)	
		Z axis	mm (inch)	510 (20.1)		625 (24.6)	
	Distance from spindle nose to table top	mm (inch)	150~660 (5.9~26.0)		150~775 (5.9~30.5)		
Table	Table size	mm (inch)	1050 x 450 (41.3 x 17.7)	1500 x 570 (59.1 x 22.4)	1600 x 670 (63.0 x 26.4)	2200 x 670 (86.6 x 26.4)	
	Table loading capacity	kg (lb)	600 (1322.8)	1000 (2204.6)	1300 (2866.0)		
	Table surface type	mm (inch)	T-SLOT (3-125(4.9) x 18(0.7)H8)	T-SLOT (4-125(4.9) x 18(0.7)H8)	T-SLOT (5-125(4.9) x 18(0.7)H8)		
Spindle	Taper	-	ISO #40				
	Max. spindle speed	Fanuc	r/min	8000 {8000*, 12000, 15000}			
		Siemens	r/min	12000 {15000}			
		Heidenhain	r/min	12000 {15000}			
		Mitsubishi	r/min	12000 {15000}			
	Max. Spindle power	Fanuc	kW (Hp)	18.5/11 (24.8/14.8) {15/11 (20.1/14.8)*, 18.5/11 (24.8/14.8), 18.5/11 (24.8/14.8)}		18.5/15 (24.8/20.1) {15/11 (20.1/14.8)*, 18.5/11 (24.8/14.8), 18.5/11 (24.8/14.8)}	
		Siemens	kW (Hp)	16.5/11 (22.1/14.8) {16.5/11 (22.1/14.8)}		21.8/16.3 (29.2/21.9) {16.5/11 (22.1/14.8)}	
		Heidenhain	kW (Hp)	17/10 (22.8/13.4) {17/10 (22.8/13.4)}		32/15 (42.9/20.1) {17/10 (22.8/13.4)}	
		Mitsubishi	kW (Hp)	18.5/11 (24.8/14.8)			
	Max. spindle torque	Fanuc	N·m (lbf-ft)	117.8 (86.9) {286 (211.1)*, 117.8 (86.9), 117.8 (86.9)}			
Siemens		N·m (lbf-ft)	141.3 (104.3) {141.3 (104.3)}		150.1 (110.7) {141.3 (104.3)}		
Heidenhain		N·m (lbf-ft)	108.2 (79.9) {108.2 (79.9)}		{108.2 (79.9)}		
Mitsubishi		N·m (lbf-ft)	117.8 (86.9)				
Feedrates	Rapid traverse rate	X axis	m/min (ipm)	36 (1417.3)		30 (1181.1)	
		Y axis	m/min (ipm)	36 (1417.3)		30 (1181.1)	
		Z axis	m/min (ipm)	30 (1181.1)			
Automatic Tool Changer	Type of tool shank	Tool shank	-	BT 40 {CAT 40 / DIN 40}			
		Pull stud	-	PS806 {Modified DIN / DIN 69872 #40}			
	Tool storage capa.	ea	30 {40, 60}				
	Max. tool diameter	Continous	mm (inch)	80 (3.1) {76 (3.0)}			
		Without Adjacent Tools	mm (inch)	125 (4.9)			
	Max. tool length	mm (inch)	300 (11.8)				
	Max. tool weight	kg (lb)	8 (17.6)				
	Max. tool moment	N·m (ft-lbs)	5.88 (4.3)				
	Tool selection		MEMORY RANDOM				
	Tool change time (Tool-to-tool)	sec	1.2				
Tool change time (Chip-to-chip)	sec	3.2			3.5		
Power source	Electric power supply (rated capacity)	kVA	29.5		40 {35}*		
	Compressed air supply	MPa (psi)	0.54 (78.3)				
Tank capacity	Coolant tank capacity	L (gal)	315 (83.2)	390 (85.8)	470 (103.4)	520 (114.4)	
Machine Dimensions	Height	mm (inch)	2985 (117.5)		3120 (122.8)		
	Length	mm (inch)	2158 (85.0)	2413 (95.0)	2597 (102.2)	2970 (116.9)	
	Width	mm (inch)	2701 (106.3)	3350 (131.9)	3650 (143.7)	4800 (189.0)	
	Weight	kg (lb)	5500 (12125.2)	7000 (15432.1)	9000 (19841.3)	10000 (22045.9)	
Control	NC system	-	DN Solutions Fanuc i Plus / SIEMENS S828D / HEIDENHAIN TNC620 / MITSUBISHI M80A				

\*{}: Optional \* 8000 r/min High torque version(FANUC only) \*\* Power capacity of 8000 r/min high torque and 12000 r/min spindle.



**Head Office**

19F, 10, Tongil-ro, Jung-gu Seoul,  
Republic of Korea, 04527  
Tel: +82-2-6972-0370/0350  
Fax: +82-2-6972-0400

**DN Solutions America**

360 E State PKWY,  
Schaumburg, IL. 60173,  
United states  
Tel: +1-973-618-2500  
Fax: +1-973-618-2501

**DN Solutions Europe**

Emdener Strasse 24, D-41540  
Dormagen, Germany  
Tel: +49-2133-5067-100  
Fax: +49-2133-5067-111

**DN Solutions India**

No.82, Jakkuar Village  
Yelahanka Hobil,  
Bangalore-560064  
Tel: + 91-80-2205-6900  
E-mail: [india@dncompany.com](mailto:india@dncompany.com)

**DN Solutions China**

Room 101,201,301, Building 39 Xinzhuan Highway  
No.258 Songjiang District China Shanghai (201612)  
Tel: +86 21-5445-1155  
Fax: +86 21-6405-1472

**DN Solutions Vietnam**

M.O.R.E building 2F, 40A-40B Ut Tich Street, 04 Ward 04,  
District Tan Binh District, Ho Chi Minh City, Vietnam  
Tel: +84 28-7304-0163

**Sales inquiry**

[sales@dncompany.com](mailto:sales@dncompany.com)