



HIGH-PRECISION, HIGH-SPEED VERTICAL
MACHINING CENTER

MP

6500




DN SOLUTIONS

MP 6500

MP 6500 vertical machining centers are designed with a thermally-symmetrical bridge type structure to optimise precision and workpiece quality. High accuracy is also enhanced by using a constantly pre-loaded high-speed spindle. Operator convenience is improved by optimised accessibility and a range of operator functions.



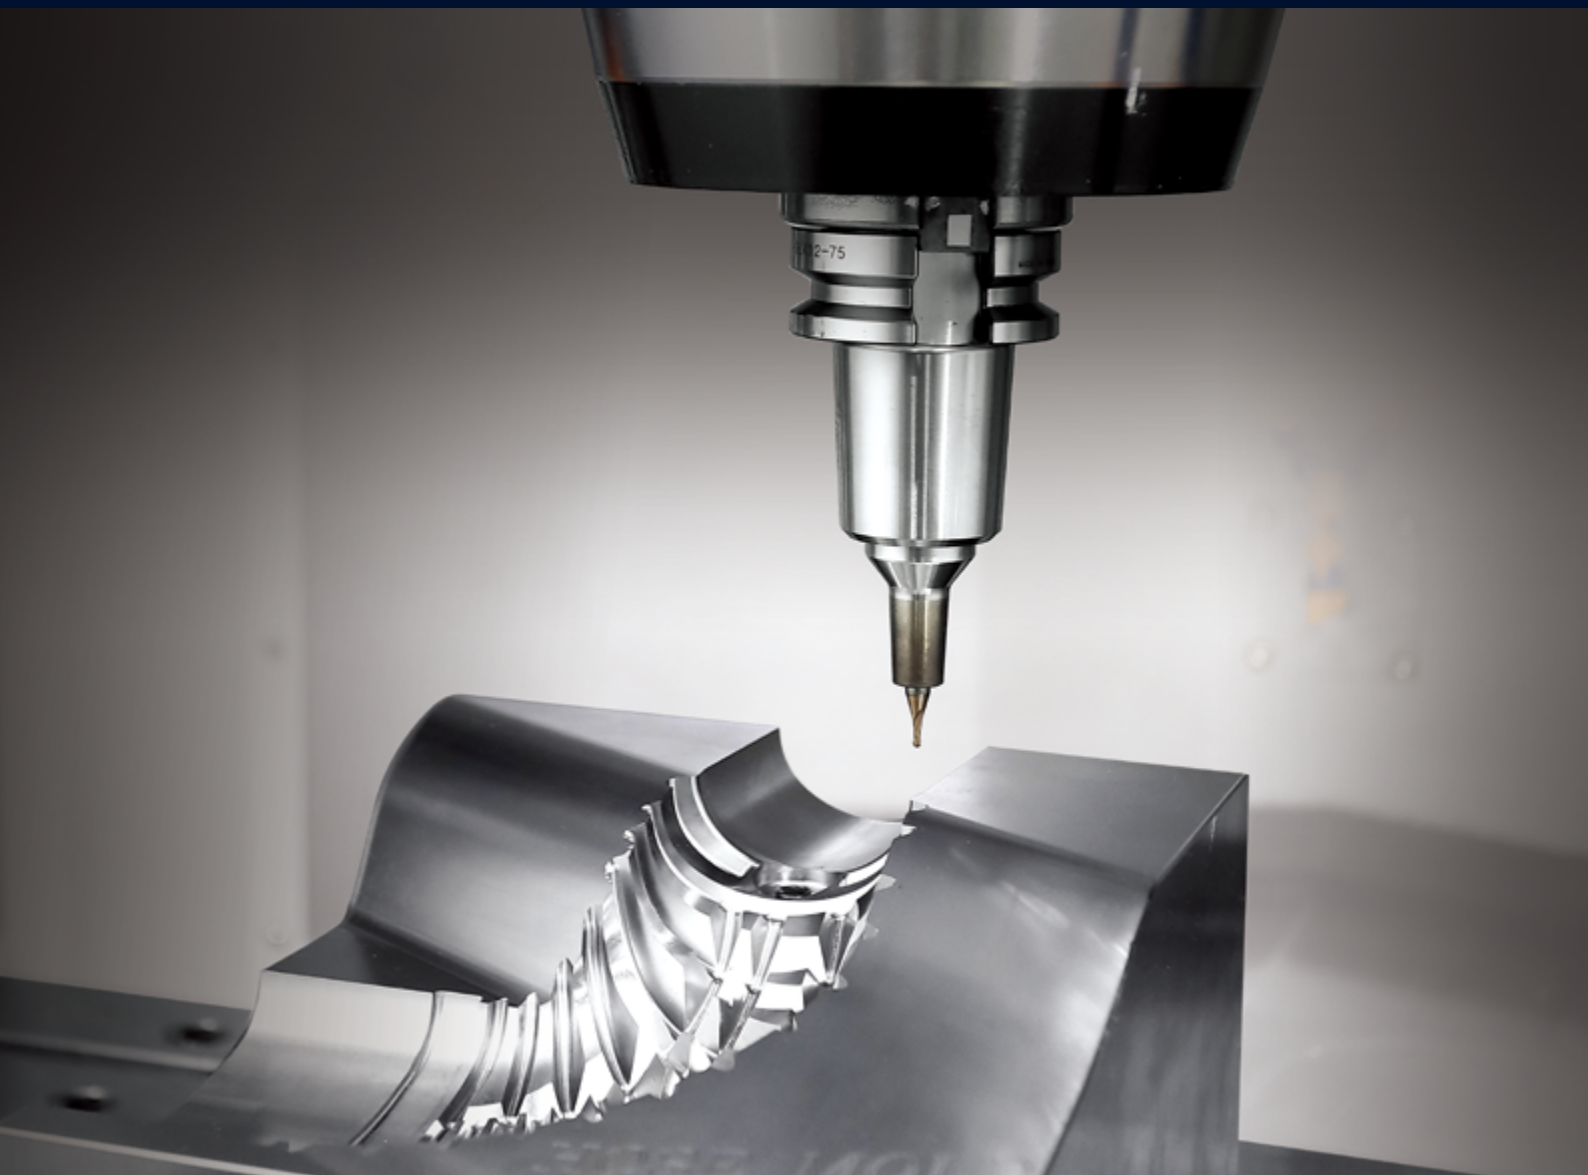

IMPROVED SPINDLE RIGIDITY AND LIFE

- Improved spindle rigidity in the low speed range and long spindle life with constant pre-loaded spindle in high speed range.

STABLE BRIDGE TYPE STRUCTURE

- Thermal analysis of the machines' symmetrical design and build, and the minimal overhang of the bridge type structure provides the optimal solution for high-speed / high-precision processing.

OPTIMIZED MOLD PROCESSING SOLUTION

- Thermal error compensation system, high speed spindle, high accuracy contour control, and the tool measurement system are provided as standard to improve mold processing performance.

BASIC STRUCTURE

MP 6500 has a bridge-type structure for high-performance and high-accuracy machining.

Bridge-type structure

Thermal analysis of the machine's symmetrical structure proves that this is the optimal solution for high precision machining of molds.

Travel distance

X axis
1100 mm 43.3 inch

Y axis
650 mm 25.6 inch


Z axis
550 mm 21.7 inch

Rapid traverse rate

X axis
30 m/min 1181.1 ipm


Y axis
30 m/min 1181.1 ipm

Z axis
30 m/min 1181.1 ipm

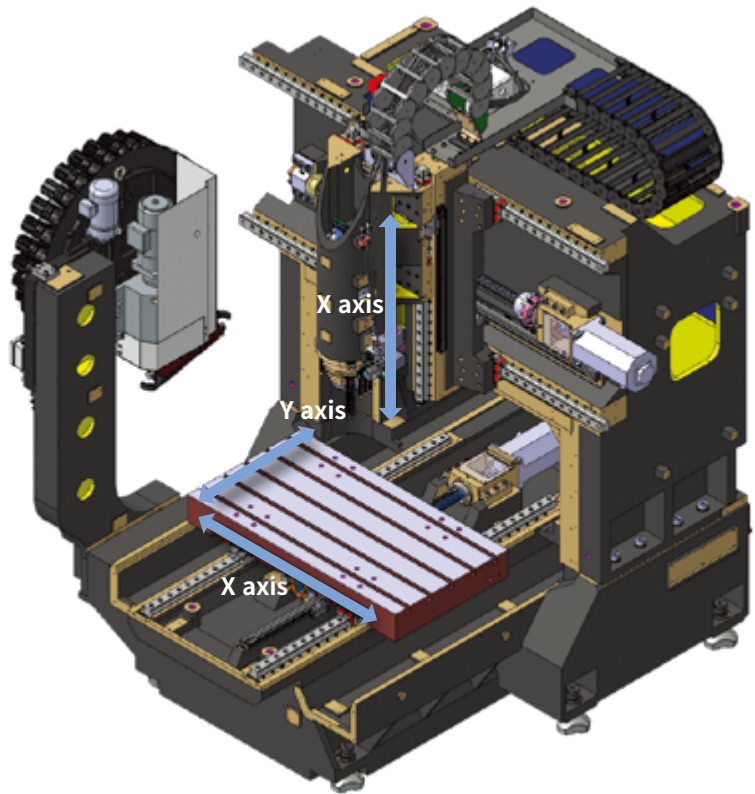


Gravity center drive structure

By minimizing the distance between the centre of gravity and the feed drive center, inertia movement is reduced allowing for faster feed rates and more precise part machining.

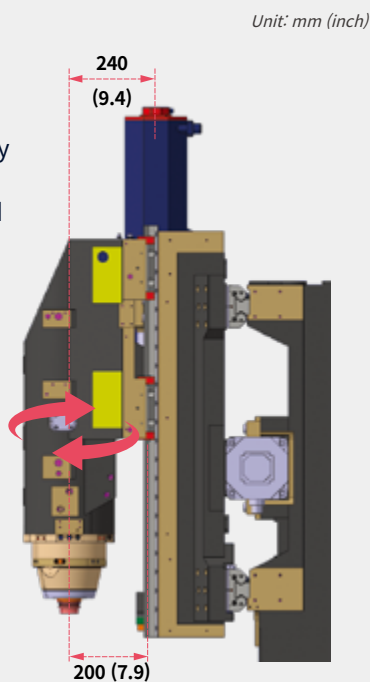

High precision

Optimization of the machine structure has increased rigidity and reduced stresses and strains.

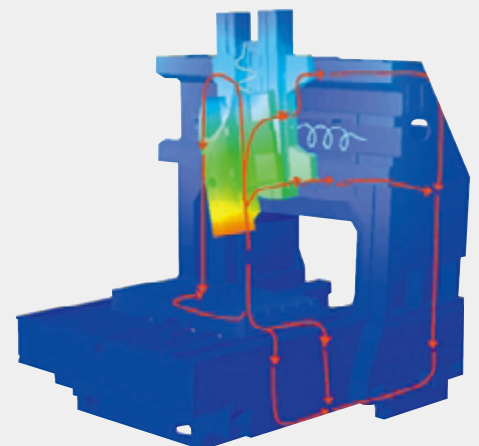


FEED SYSTEM

The linear axes are equipped with roller linear guideways for increased rigidity and a cooling system supplied as standard to minimize thermal error.


High-precision travel system

Roller-type linear guideways, high-rigidity coupling and a ball screw nut cooling system achieve high rigidity and outstanding linear axis accuracy of the feed drive system.

Roller linear guideway

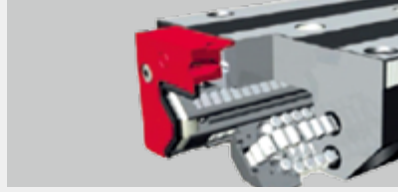


Rigid coupling

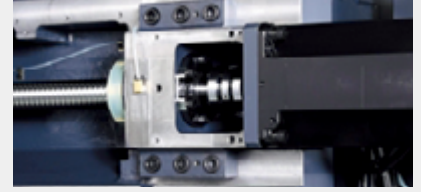

Ball screw nut cooling


Reduced thermal displacement of feed shafts. Stability and rigidity of the feed system.

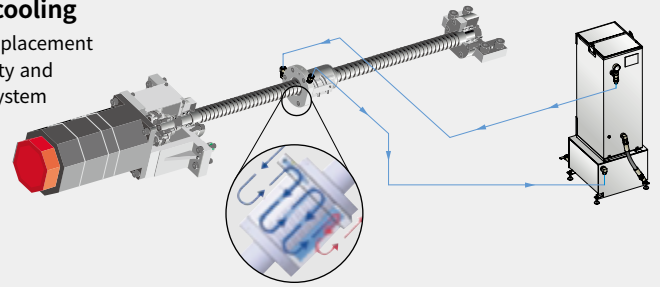


High power servo motor

The responsiveness of each axis feed system is improved by reducing the load / motor inertia ratio by 50%.

MP 6500



General processing system



Automatic tool changer

Enhanced productivity achieved with the high speed tool changer.

TOOL CHANGER


Rapid tool change reduces idling time and improves productivity.

Tool storage capacity

30, 40 ea option

Tool change time

1.6 s

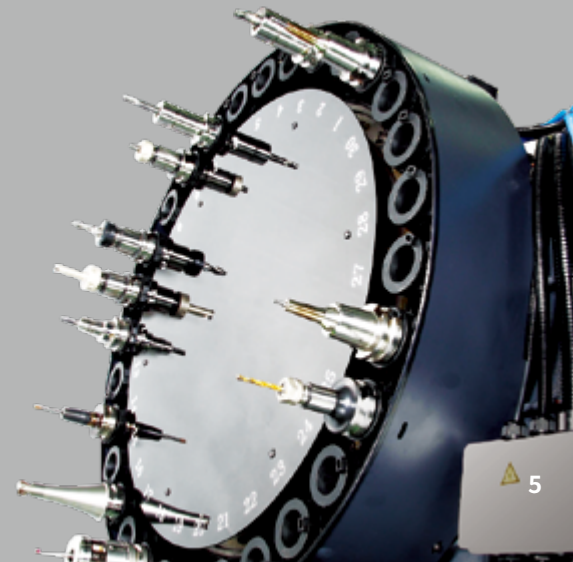

SPINDLE

High-precision spindle and excellent dynamic balancing reduces vibration during high-speed machining and ensures high accuracy.

High-rigidity, high-precision spindle

With its new constant preloading structure, improved spindle rigidity in the low speed range and long spindle life are realised.

Max. spindle speed

20000 r/min

15000 / 30000 /

40000 r/min option

Spindle motor power

22 / 11 kW

29.5 / 14.8 Hp




Spindle type and tool specification

A high-speed spindle, up to 40000 r/min, can be selected according to customers' machining requirements (i.e., workpiece materials and cutting conditions). A dual-contact spindle can be selected to improve surface finishes and to extend tool life.

Item	20000 r/min	15000 r/min <small>option</small>	30000 r/min <small>option</small>	40000 r/min <small>option</small>
Spindle motor power kW (Hp)	22 / 11 (29.5 / 14.8)	37 / 22 (49.6 / 29.5)	18.5 / 13 (24.8 / 17.4)	5.5 / 3.7 (7.4 / 5.0)
Taper spindle	ISO#40	ISO#40	HSK-F63	HSK-E40


Spindle cooling system

Cooling system removes heat generated at the bearings and motor to minimize thermal error. The air-oil cooling system removes heat generated at the bearings and motor to reduce thermal error and extend machine tool service life.

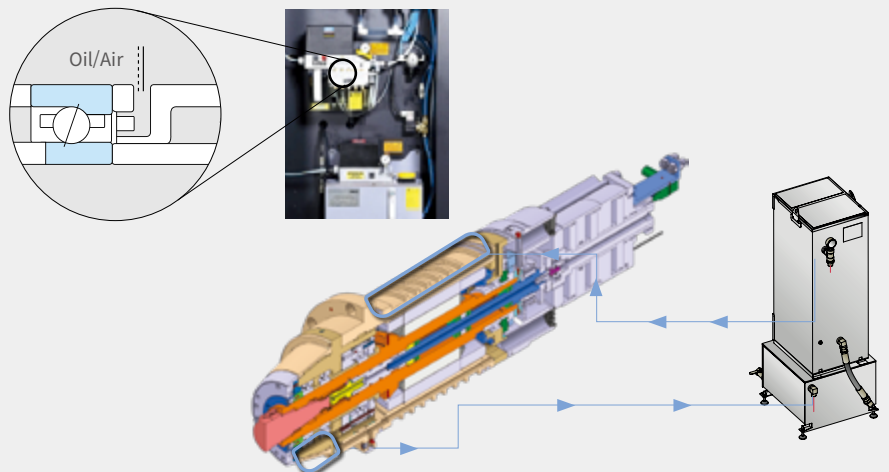

TABLE

Wide cutting area for machining a diverse range of workpieces.

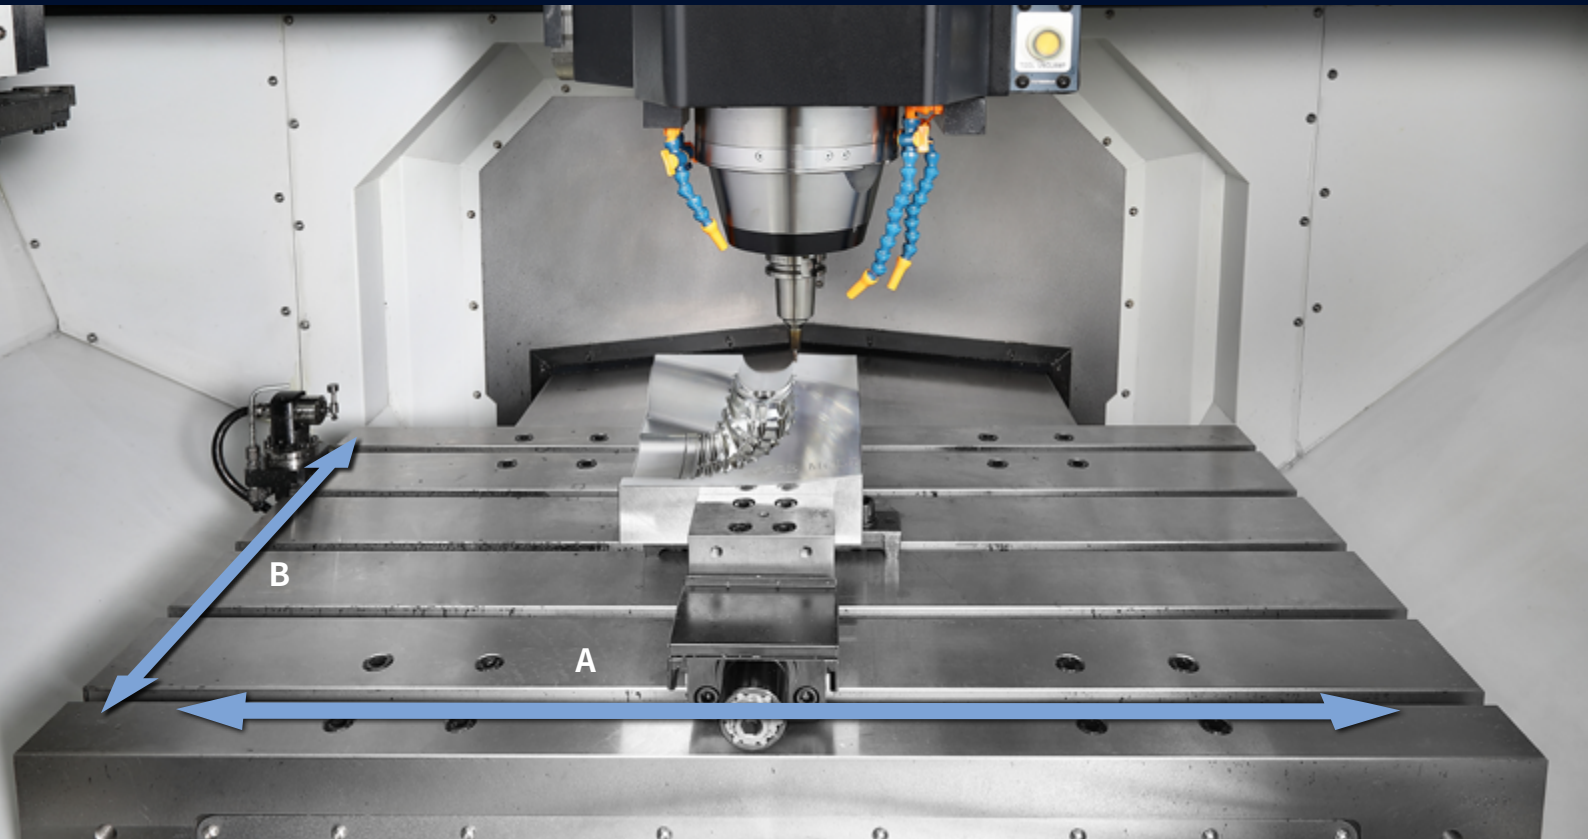

Wide cutting area

The size and load capacity of the table allow for the setting up and machining of large and diverse-shaped workpieces.

Table size (A x B)

1200 x 650 mm
47.2 x 25.6 inch

Table loading capacity


800 kg
1763.7lb

Z-axis fine feeding

Z axis : 0.4mm Repeat
feed (0.016 inch)

Spindle speed

19000 r/min

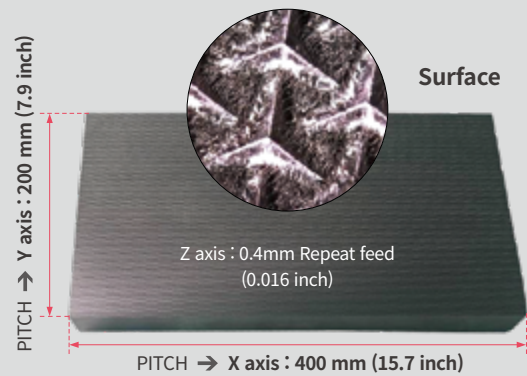

Machine	MP 6500	
Item	Pattern mold	
Material	HP4M	
Condition	Tool	F1 Ball Endmill
	Spindle speed / Feed rate	Speed : 19000 r/min Feed : 800 mm/min (31.5 ipm)
	Time	134 hr

OPTIMIZED TOOL PROCESSING SOLUTION

Superior surface finishes and superior machining precision are achieved by using standard DN Solutions processing solutions, such as high speed / high precision contour control and thermal displacement compensation functions.

High speed / high precision contour control


- **DSQ1** (AICC2 _ 200 Block + Machining condition selection function)
- **DSQ2** option (DSQ1 + Data server [1GB])
- **DSQ3** option (DSQ2 + High speed processing _ 600 Block)



*DSQ : DN Solutions Super Quality

Tool load monitoring system (DTMM*)


The technology of protecting tool and machine in abnormal load during the cutting process

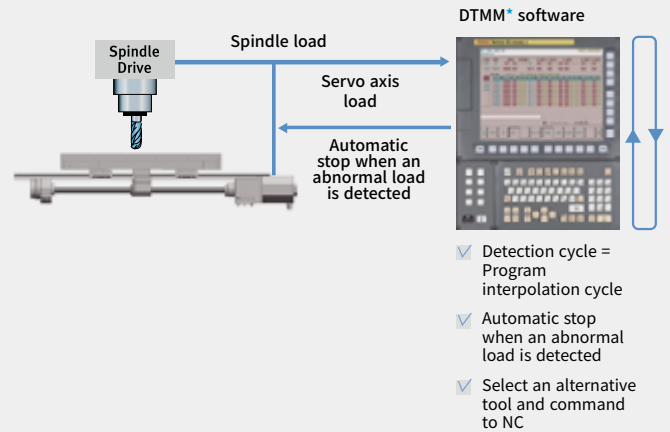

*DTMM : DN Solutions Tool load Monitoring for Machining Centers

The optimal feed control (DAFC*)

Optimal feed control is ensured by realtime spindle load detection.

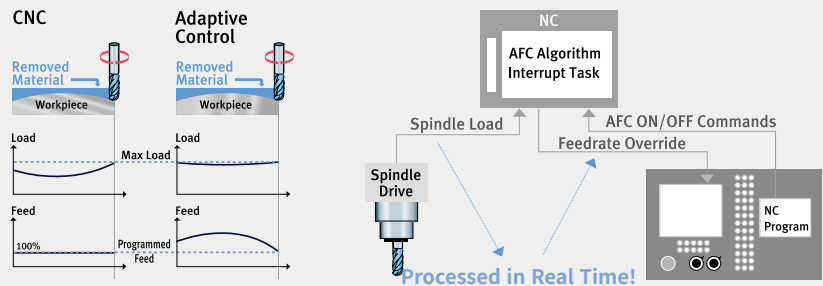

*DAFC : DN Solutions Adaptive Feedrate Control

Smart thermal displacement multi compensation technology


Realizes high-quality, high-precision machining with smoothing thermal displacement compensation of the spindle and structure.

Compensation of static displacement of spindle

Compensates changes in tool position caused by expansion of the spindle shaft at high speed.



Structure thermal displacement compensation

Compensates irregular deflection or expansion of the structure due to ambient temperature using a multiple temperature sensors.



Compensation of structure thermal displacement

Thermal error of the spindle caused by heat accumulation is compensated with 5 algorithms including a smoothing function.

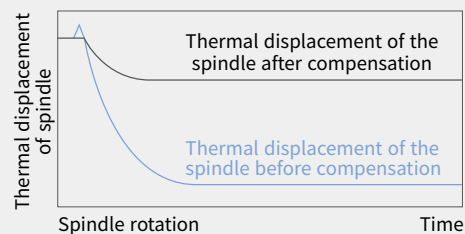


STANDARD | OPTIONAL SPECIFICATIONS

A range of options is available to suit individual requirements.

Description	Features	MP 6500	
Electric cabinet light		○	
Electric cabinet line filter		○	
Electric cabinet air conditioner		○	
Linear scale	X Axis	○	
	Y Axis	○	
	Z Axis	○	
Through spindle coolant	NONE	●	
	1.5 KW_2.0 MPA	○	
	5.5 KW_7.0 MPA_Dual bag filter	○	
Spindle motor power	22/11 kW	●	
	37/22 kW	○	
	18.5/13 kW	○	
	5.5/3.7 kW	○	
Spindle speed	20000 r/min	●	
	15000 r/min	○	
	30000 r/min	○	
	40000 r/min	○	
Air gun		○	
Air blower		●	
Oil Skimmer	Belt type	○	
Auto NC power off		○	
Automatic tool changer	30 Tools	●	
	40 Tools	○	
Automatic tool measurement	TS27R : RENISHAW	●	
	Z-MT : BLUM	○	
Automatic tool measurement master tool		○	
Automatic workpiece measurement		○	
Coolant Tank		●	
Coolant Pump		●	
Gravity axis drop prevention		○	
Chip conveyor	Hinge / Scraper / Drum filter type	○	
Work & tool counter	Work / Tool	○	
Coolant gun		○	
Coolant chiller		●	
Test bar		○	
Power transformer		○	
DAFC		●	
DSQ	DSQ3	●	
DSTC		●	
DTMM		●	
Easy Operation Package	Tool load monitor	●	
	Alarm / M-code / G-code / ATC recovery help	●	
	Table moving for setup / Easy work coordinate setting	●	
MPG	1 MPG_PORTABLE TYPE	●	
	1 MPG_PORTABLE_W/ENABLE TYPE	○	
NC System	FANUC 31iB	●	
	HEIDENHAIN iTNC530	○	
NC system lcd size	15 inch_FANUC (Color)	●	
	15.1 inch_HEIDENHAIN (Color)	○	
Magnetic Chuck	SPIDER (SM5508C, SM5609C)	○	
	ASSFALG (508HD50, 610HD50)	○	
	Fire extinguisher (Auto)	○	
Customized special option	Coolant level switch : Sensing level - Low / High	○	
	Raising blocks	○	
	Anchoring	Anchoring	○
		RENISHAW / NC4	○
	Auto tool length measurement	BLUM / Micro-compact laser control NT	○
		BLUM / Z-MT, Z-NANO HP	○
	Auto workpiece measurement	OMRON / D5A	○
		NIDDLE	○
	Auto workpiece measurement	RENISHAW / OMP60	○
	4th axis preparation cabling for servo/ 1-pneumatic piping	Factory ready made	○
	4th axis with CNC rotary table	Φ300	○
		Depends on the table	○
	Coolant system - middle pressure TSC II		○

*Please contact DN Solutions to select detail specifications.

● Standard ○ Optional x Not applicable




There is a high risk of fire when using non-water-soluble cutting fluids, processing flammable materials, neglecting the controlled and careful use of coolants and modifying the machine without the consent of the manufacturer. Always check the SAFETY GUIDELINES carefully before using the machine.

PERIPHERAL EQUIPMENT

Help deliver excellent performance in diverse machining conditions.

Improved spindle rigidity and life

Improved spindle rigidity in the low speed range and long spindle life for high speed operations achieved with constant pre-loaded spindle.

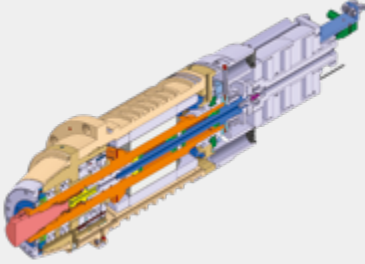

Machine temperature controlled spindle and axis drive cooling system

Accurate spindle cooling
Accurate ball screw cooling




Auto tool measuring equipment

Tool length measurement
Tool diameter measurement and damaged tool detection



Chip disposal

Efficient and effective chip management systems and options improve productivity and performance and help ensure a better working environment.



1. Coolant system

Side coolant chip air blower.
Coolant residue stopping device



2. Barrier between the magazine and cutting area

The tool magazine is protected from the cutting area with an automatic door.




3. Chip conveyor option


MP 6500 - Side exhaust



Hinge type




Scraper type



Drum filter type

Coolant chiller

The chiller lowers coolant temperature, helping to cool both the workpiece and tool during machining operations. When using insoluble cutting oils, a coolant chiller is recommended to cool the oil and maintain machining precision.

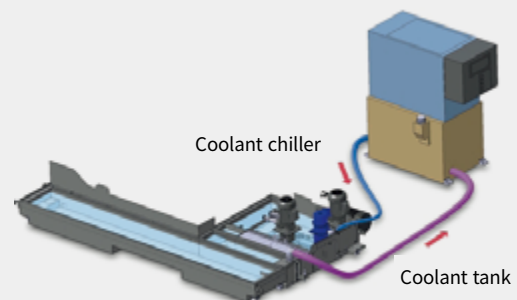

CONVENIENCE

Operator convenience and work efficiency have been improved through the adoption of various convenient control functions and the machine's ergonomic design.

Operating console



1. 15" color TFT LCD monitor



2. Mono lever



3. Membrane keyboard



4. Portable MPG



LCD portable MPG handle option



5. Hot key




6. Temperature display device option

Operators can check the processing area, coolant, bed and temperature on the display.


Convenient absolute feed

The current position of the machine is stored and maintained using battery power. Zero point return is not necessary after a power cycle interruption.


Excellent accessibility

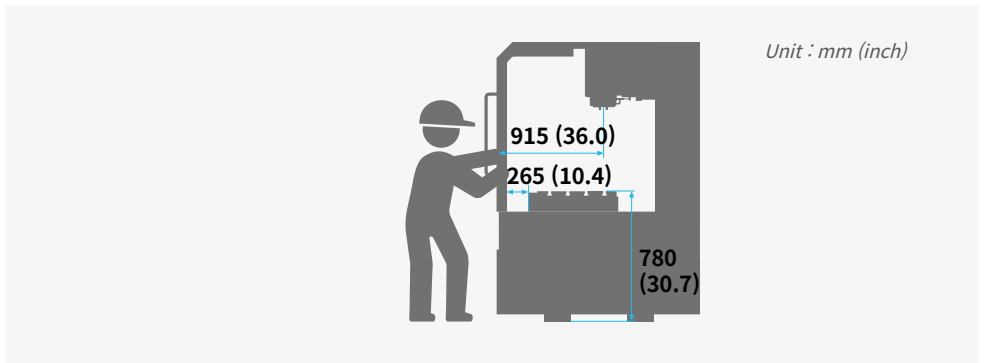

System condition indicator

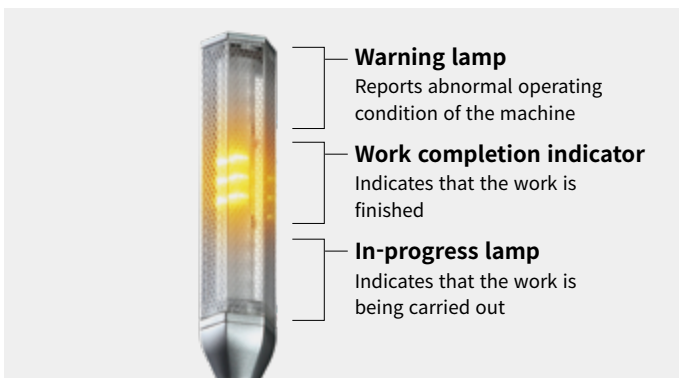

LED indoor work light

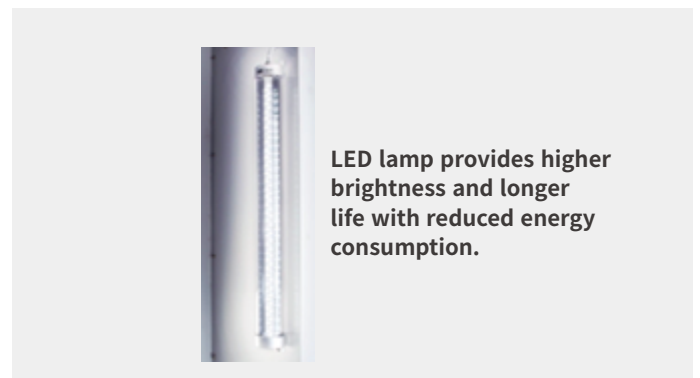

FANUC 31i/32i PLUS

Fanuc 31i/32i Plus maximizes customer productivity and convenience.

15" Touch screen + New OP

DN Solutions Fanuc 31iB/B5 Plus' operation panel enhances operating convenience by incorporating common-design buttons and layout. It features a Qwerty keyboard for fast and easy data input and operation.

Fanuc 31i/32i Plus

- 15-inch color display
- Intuitive and user-friendly design

USB and PCMCIA card QWERTY keyboard

- EZ-Guide i standard
- Ergonomic operator panel
- 4MB Memory
- Hot keys
- Enhance AICC BLOCK
- Touch pen provided as standard



iHMI touchscreen

iHMI provides an intuitive interface that uses a touchscreen for quick and easy operation.

Range of applications

Providing various applications related to planning, machining, improvement and utility, for customer convenience.

NUMERIC CONTROL SPECIFICATIONS

FANUC


Item		Specifications	F31iB Plus MP 6500
Controlled axis	Controlled axes		5 (X,Y,Z)
	Simultaneously controlled axes		5 axes
Data input/output	Additional controlled Axis	Add 1 Axis (5th Axis)	●
	Fast data server		○
	Memory card input/output		●
	USB memory input/output		●
Interface function	Large capacity memory(2GB)*2	Note *2) Available Option only with 15" Touch LCD (iHMI Only)	○
	Embedded Ethernet		●
	Fast Ethernet		○
Operation	Enhanced Embedded Ethernet function		●
	DNC operation	Included in RS232C interface.	●
	DNC operation with memory card		●
Program input	Workpiece coordinate system	G52 - G59	●
	Addition of workpiece coordinate system	G54.1 P1 X 48 (48 pairs)	●
	Tool number command		T4 digits
	Tilted working plane indexing command	G68.2 TWP	X
Feed function	AI contour control I	G5.1 Q, 40 Blocks	X
	AI contour control II	G5.1 Q, 200 Blocks	X
	AI contour control II	G5.1 Q, 600 Blocks	X
	AI contour control II	G5.1 Q, 1000 Blocks	●
	High smooth TCP		X
Operation guidance function	EZ Guidei (Conversational Programming Solution)		●
	iHMI with Machining Cycle	Note *1) Only with 15" Touch LCD standard	X
	EZ Operation package		●
Setting and display	CNC screen dual display function		●
Network	FANUC MTConnect		⊕
	FANUC OPC UA		⊕
Others	Display unit	10.4" color LCD	X
		15" color LCD	X
		15" color LCD with Touch Panel	●
	Part program storage size & Number of registerable programs	640M(256KB)_500 programs	X
		1280M(512KB)_1000 programs	○
		2560M(1MB)_1000 programs	○
		5120M(2MB)_1000 programs	○
		10240M(4MB)_1000 programs	●
		20480M(8MB)_1000 programs	○
		2560M(1MB)_2000 programs	○
		5120M(2MB)_4000 programs	○
		10240M(4MB)_4000 programs	○
20480M(8MB)_4000 programs	○		

EZ WORK

The software developed by DN Solutions features numerous functions designed for convenience and ease of operation.

EZ work

The EZ work delivers speed and efficiency. This menu-driven innovation not only helps customers reduce setup times, but also simplifies common tasks and procedures, reducing the potential for errors. EZ work reduces operating time, protects machinery, enhances quality and speeds up maintenance interventions.

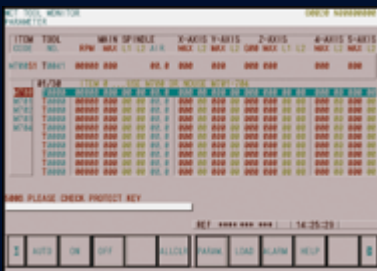


Tool Load Monitor

Function to automatically monitor tool load (Different loads can be set for one tool according to M700 ~ M704)



M/G-Code List

Functional description of M code and G code

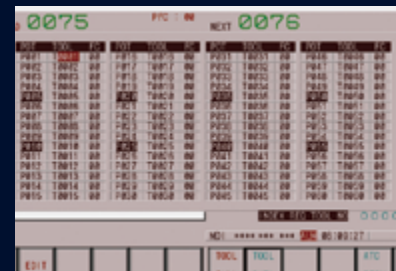

Tool Management

Function to manage tool information [Tool information / Tool No. / Tool condition (normal, large diameter, worn / damaged, used for the rst time, manual) / Tool name]



Operation Rate

Machine operation history management function by date based on load



Adaptive Feed Control

Function to control feedrate so that the cutting can be carried out at a constant load (To adapt to the spindle load set up with constant load feedrate control function)



Work Offset Setting

Function to configure various work offset settings




Spindle Warm Up

A function that assists spindle warm-up for spindle life when the spindle has not been used for a certain period of time



ATC Recovery

Function to view detailed info with recommended actions and to perform step-by-step operation manually (when an alarm is triggered during an ATC operation)

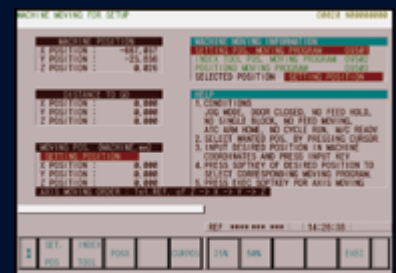


Machine Move

A function to store frequently moved locations and use them as soft keys

POWER | TORQUE


20000 r/min

Max. spindle speed : 22 kW (29.5 Hp)
Spindle motor power : 60 N·m (44.3 ft-lb)

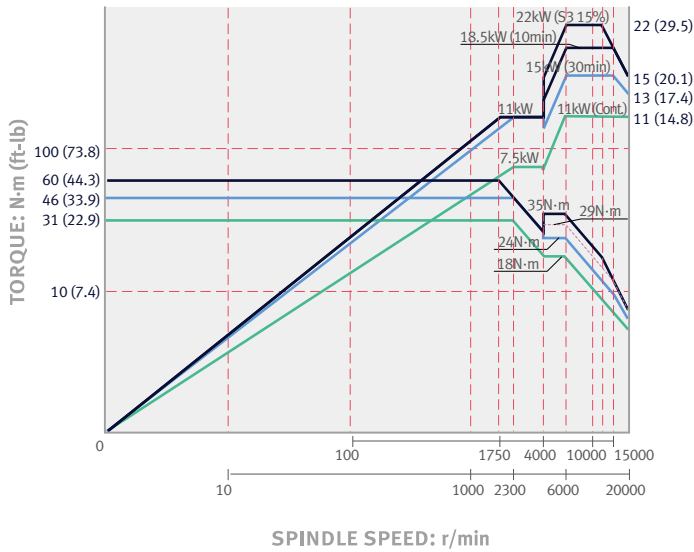


15000 r/min option

Max. spindle speed : 37 kW (49.6 Hp)
Spindle motor power : 303 N·m (223.6 ft-lb)

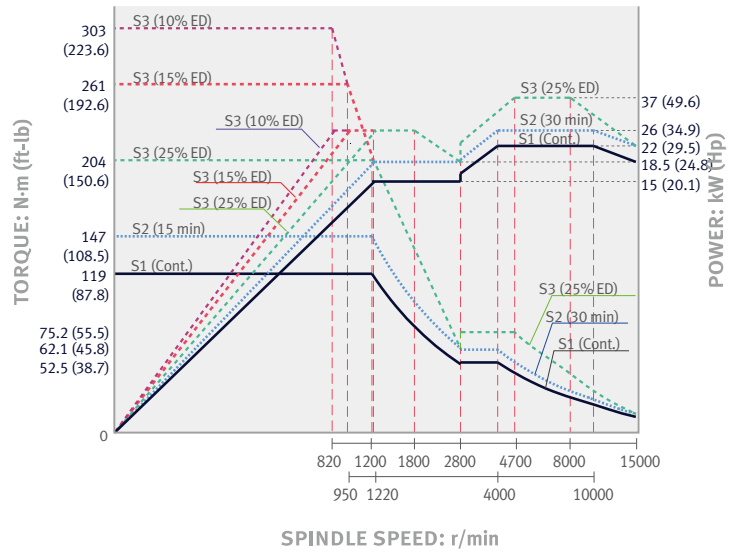


30000 r/min option

Max. spindle speed : 18.5 kW (24.8 Hp)
Spindle motor power : 5.9 N·m (4.4 ft-lb)

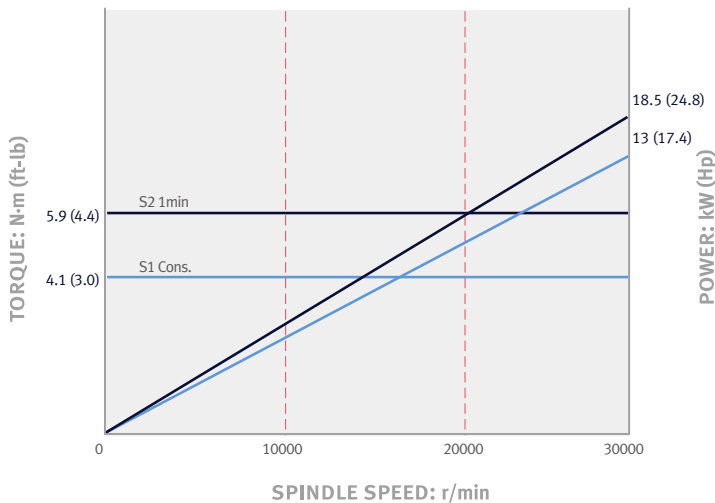




40000 r/min option

Max. spindle speed : 5.5 kW (7.4 Hp)
Spindle motor power : 3.5 N·m (2.6 ft-lb)

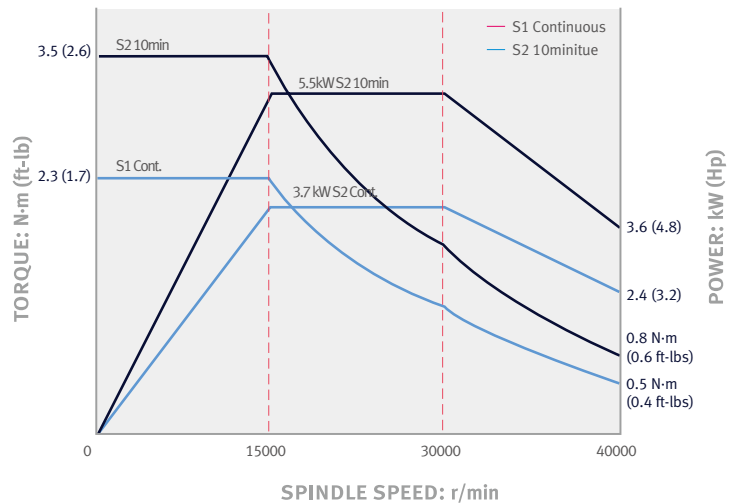

DIMENSIONS

Units : mm (inch)

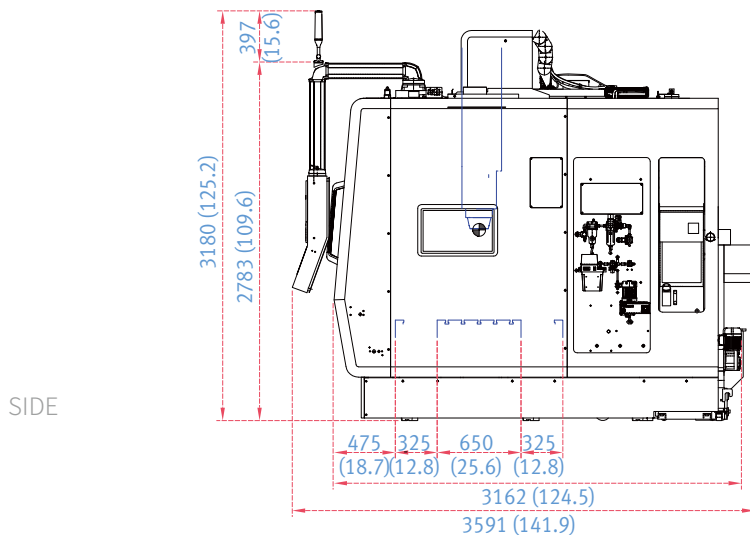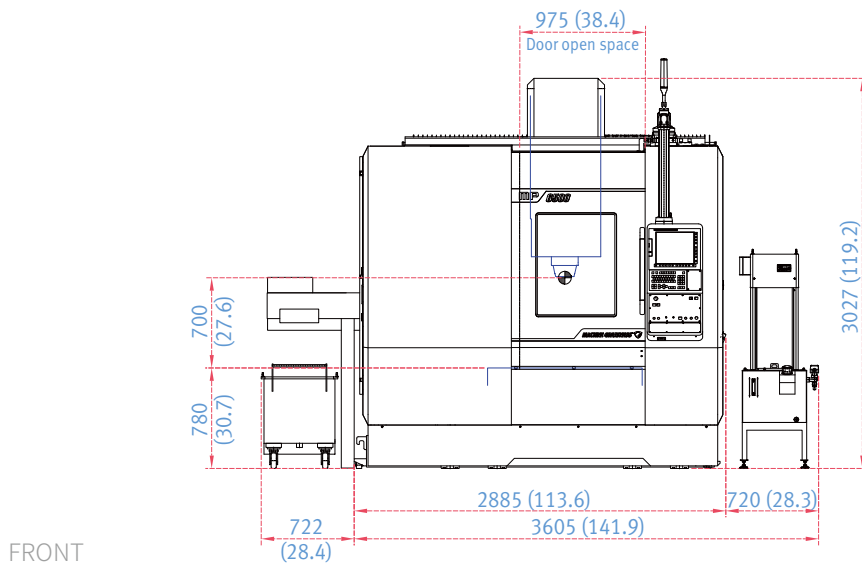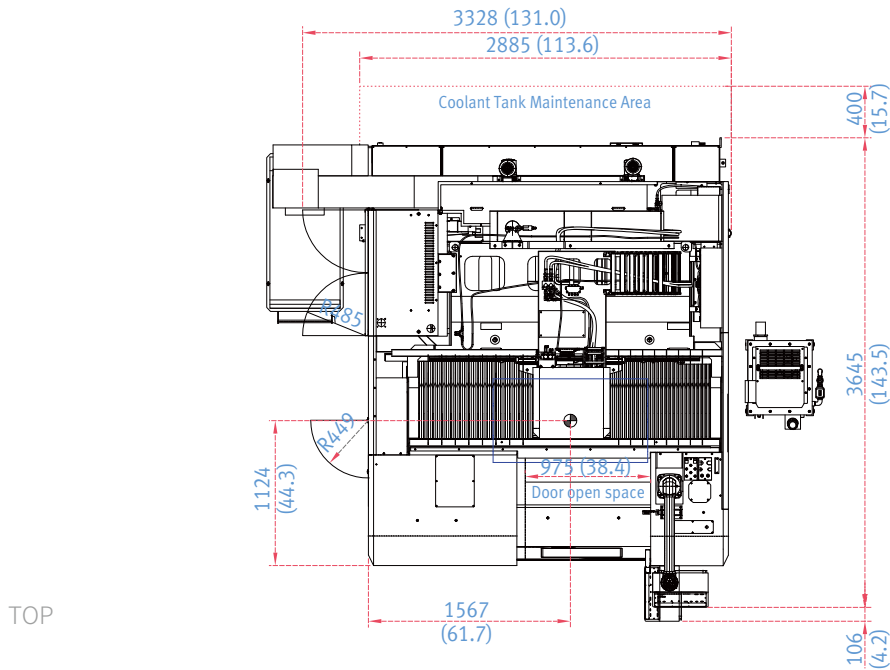


* Some peripheral equipment can be placed in other areas.

TABLE

Table dimensions


Units : mm (inch)

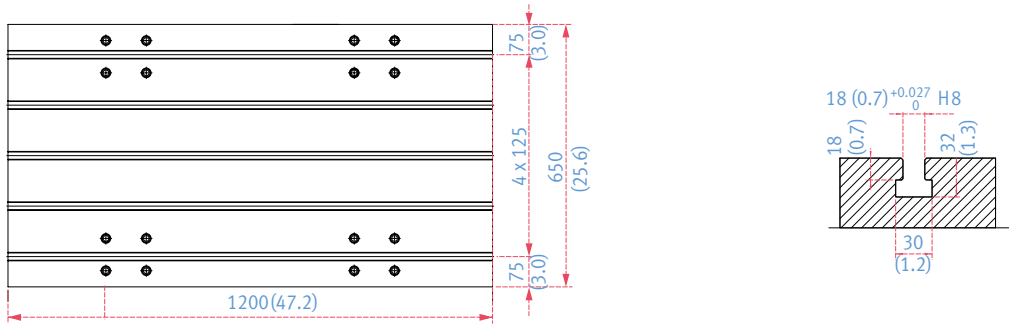


Tool shank

Units : mm (inch)

20000 r/min, 15000 r/min

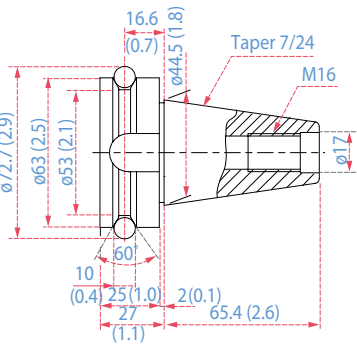


MAS 403 BT40



T-SLOT


PS-806 (NIKKEN)

20000 r/min, 15000 r/min **option**

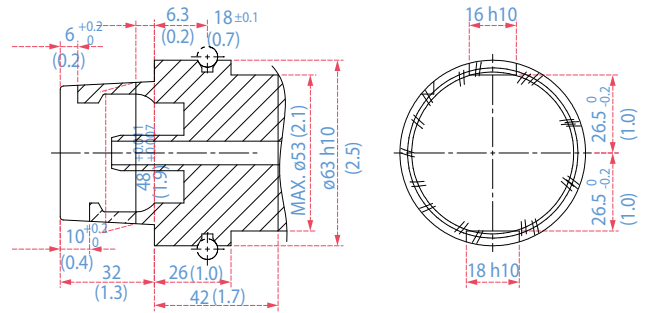


HSK A63

30000 r/min **option**



HSK-F63

40000 r/min **option**

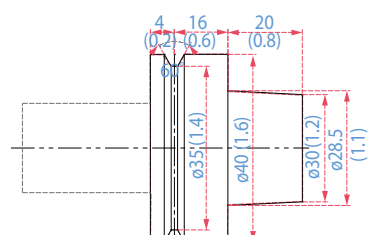

HSK-E40

MACHINE SPECIFICATIONS

Item		Unit	MP 6500
Travels	X, Y, Z axis	mm (inch)	1100 / 650 / 550 (43.3 / 25.6 / 21.7)
	Distance from spindle nose to table top	mm (inch)	150 ~ 700 (5.9 ~ 27.6)
Feedrates	Rapid traverse (X / Y / Z axis)	m/min (ipm)	30 / 30 / 30 (1181.1 / 1181.1 / 1181.1)
	Cutting feedrate	mm/min (ipm)	15 (0.6)
Table	Table size	mm (inch)	1200 x 650 (47.2 x 25.6)
	Table loading capacity	Kg (lb)	800 (1763.7)
Spindle	Max. spindle speed	r/min	20000 {15000, 30000, 40000}
	Spindle motor (10min/cont.)	kW (Hp)	22 / 11 {37/22, 18.5/13, 5.5/3.7}* (29.5 / 14.8 {49.6/29.5, 24.8/17.4, 7.4/5.0})
	Taper spindle	Taper	ISO #40 {ISO #40, HSK-F63, HSK-E40}*
	Max. spindle torque (10min)	N.m (ft-lbs)	60 {303, 5.9, 3.5}* (44.3 {223.6, 4.4, 2.6})
Automatic Tool Changer	Number of tools	ea	30 {40}
	Max. tool diameter	mm (inch)	80 (3.1)
	Max. tool diameter without adjacent tools	mm (inch)	125 (4.9)
	Max. tool length	mm (inch)	300 (11.8)
	Max. tool weight	Kg (lb)	8 (17.6)
	Max. tool moment	N · m (ft-lbs)	7.84 (5.8)
	Tool change time (tool-to-tool)	s	1.6
Power Source	Electric power supply	kVA	48.55 {50, 46.93, 35.05}*
Tank Capacity	Coolant tank capacity	L (gal)	230 (60.8)
	Lubrication tank capacity	L (gal)	4.3 (1.1)
Machine Dimensions	Length x Width	mm (inch)	2820 x 3315 (111.0 x 130.5)
	Height	mm (inch)	3036 (119.5)
	Weight	Kg (lb)	10000 (22045.9)
NC system		-	F31iB Plus

The DN Solutions promise, MACHINE GREATNESS, has two important meanings. The first is simple: DN Solutions makes great machines. The second is a challenge to our end-users. With a product line that is this comprehensive, accurate and reliable, we equip our customers to machine greatness. The big question: **Why should you choose DN Solutions over other options?**

Here's why...



**MACHINE
GREATNESS™**



WHAT YOU MAKE AND HOW YOU MAKE IT MATTERS—SO MAKE IT
GREAT WITH DN SOLUTIONS.

UNBEATABLE MACHINES

You won't find a more comprehensive range or a better combination of value, performance and reliability anywhere else.

ROBUST PRODUCT LINE

We offer an impressive range of machine models and hundreds of configurations. Whatever your machining needs and requirements, there's a DN Solutions for you.

READILY AVAILABLE - ANYWHERE IN THE WORLD

Machining centres (including 5-axis machines), lathes, multi-tasking turning centres and mill-turn machines, and horizontal borers with best-in-class specifications are all available...ready to install.

EXPERT SERVICE

Our dedicated, experienced and knowledgeable team is totally committed to improving your productivity, growth and success.

RESPONDING TO CUSTOMERS ANYTIME, ANYWHERE

DN Solutions Global Network

DN Solutions provides systems-based professional support services, before and after the machine tool sale, by responding quickly and efficiently to customers. By supplying spare parts, product training, field service and technical support, we provide the expert care, attention and assistance our customers expect from a market leader.

Global sales and service support network		51	Technical centers Technical center, Sales support, Service support, Parts support
4	Corporations	200	Service posts
155	Dealer networks	3	Factories



CUSTOMER SUPPORT AND SERVICES

We're there for you whenever you need us.

We help our customers operate at maximum efficiency by providing them with a range of tried, tested and trusted services - from pre-sales consultancy to post-sales support.



Field services

- On-site service
- Machine installation and testing
- Scheduled preventive maintenance
- Machine repair service



Parts supply

- Supplying a wide range of original DN Solutions spare parts
- Parts repair service



Training

- Programming, machine setup and operation
- Electrical and mechanical maintenance
- Applications engineering



Technical support

- Supports machining methods and technology
- Responds to technical queries
- Provides technical consultancy



dn-solutions.com

Head Office

22F T Tower, 30, Sowol-ro 2-gil
Jung-gu, Seoul, Korea, 04637

Tel: +82-2-6972-0370/0350
Fax: +82-2-6972-0400

DN Solutions America

19A Chapin Road, Pine Brook
New Jersey 07058, United States

Tel: +1-973-618-2500
Fax: +1-973-618-2501

DN Solutions Europe

Emdener Strasse 24, D-41540
Dormagen, Germany

Tel: +49-2133-5067-100
Fax: +49-2133-5067-111

DN Solutions India

No.82, Jakkuar Village
Yelahanka Hobli, Bangalore-560064

Tel: + 91-80-2205-6900
E-mail: india@dncompany.com

DN Solutions China

Room 101,201,301, Building 39 Xinzhuan
Highway No.258 Songjiang District
China Shanghai (201612)

Tel: +86 21-5445-1155
Fax: +86 21-6405-1472

Sales inquiry

sales@dncompany.com

* For more details, please contact DN Solutions.

* Specifications and information contained within this catalogue may be changed without prior notice.